

Model Numbers: JY350, JY450, JY750

DEPEND ON
DAVEY

WATER PRODUCTS

JET PUMP

PRODUCT DESCRIPTION

Economical, compact - single stage jet assisted centrifugal pumps, to provide reliable, higher pressures at flows to 75lpm.

APPLICATIONS

- Ideal for elevated tank filling
- Domestic water supply
- Water transfer
- Pressure boosting



FEATURES & BENEFITS

Single stage jet assisted centrifugal pump

- Higher operating pressures
- Less moving parts for increased dependability
- Self priming for easier installation

Corrosion resistant and stainless steel pump components

- Longer life when pumping a variety of water qualities
- Reduced friction within the casing and impellers

High quality purpose built 2 pole, 50Hz, IP55 TEFC motors with

- Permanent split capacitor starting for dependable and frequent starting everytime
- In-built thermal overload for long motor life and protection against motor damage due to jamming

- High quality sealed bearings for longer life
- Fitted with a power lead for ease of connection to power supply
- Resists ingress of dust & dirt

Designed with the serviceman and installer in mind

- Suction and discharge are close for easier installation
- Quality components throughout for long life and easier maintenance

Every pump is performance and pressure tested in the factory to ensure quality and reliability

OPERATING LIMITS


	JY350	JY450	JY750
Capacities to	37lpm	43lpm	75lpm
Maximum total head	37m	46m	31m
Maximum liquid temp.		45°C	
Maximum ambient temp.		55°C	
Maximum suction lift		7m	
Maximum casing pressure		600kPa	
Max. incoming (suction) pressure		140kPa	
Inlet size		1" BSP(F)	
Outlet size		1" BSP(F)	

TECHNICAL SPECIFICATIONS

MATERIALS OF CONSTRUCTION

PART	MATERIAL
Impellers	304 stainless steel
Pump casing	304 stainless steel
Pump shaft	316 stainless steel
Seal ring (stationary)	Ceramic
Seal ring (rotating)	Carbon
Seal ring elastomer	Nitrile rubber
Seal spring	304 stainless steel
O-ring	Nitrile rubber
Jet/venturi/cover plate	Glass filled thermoplastic
Motor shell	Aluminium
Motor shell finish	Polyester


HYDRAULIC PERFORMANCE

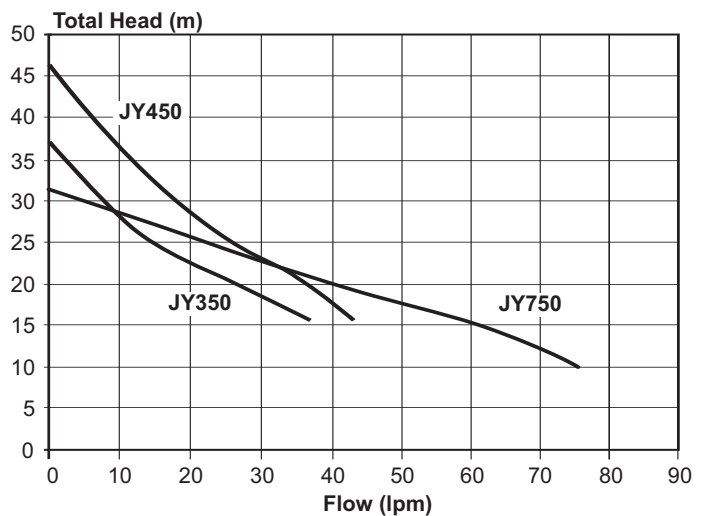

INSTALLATION & PRIMING

- On installations with suction lifts, a good quality foot valve should be fitted to avoid loss of prime.
- The system is primed by filling with water. Ensure all suction pipes are air tight.

DIMENSIONS

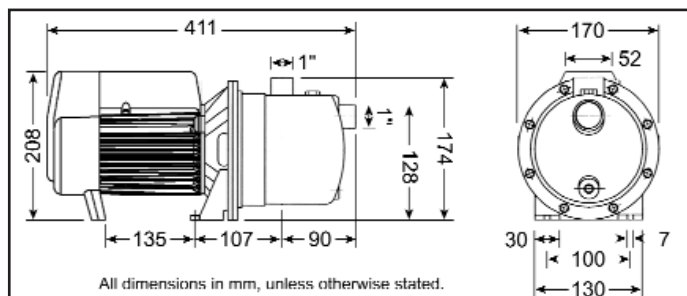

Model	Weight (kg)
JY350	6
JY450	8
JY750	8

ELECTRICAL DATA

Model number	JY350	JY450	JY750
Nominal rpm	2900		
Volts / hertz / phase	220-240 / 50 / 1		
IP rating / insulation	55 / Class F		
Amps	2.5	3.5	
kW (P ₁) / (P ₂)	0.52 / 0.37	0.68 / 0.49	
Nominal hp	0.7	1	



Davey Water Products Pty Ltd

Member of the GUD Group
ABN 18 066 327 517

AUSTRALIA
Head Office and Manufacturing
 6 Lakeview Drive,
 Scoresby, Australia 3179
 Ph: +61 3 9730 9222
 Fax: +61 3 9753 4100
 Website: davey.com.au

Davey Support Centre
 Ph: 1300 369 100
 Fax: 1300 369 119
 E-mail: sales@davey.com.au

NEW ZEALAND
 7 Rockridge Avenue,
 Penrose, Auckland 1061
 Ph: +64 9 570 9135
 Fax: +64 9 527 7654
 E-mail: sales@daveynz.co.nz
 Website: daveynz.co.nz

Davey Support Centre
 Ph: 0800 654 333

REST OF WORLD
 6 Lakeview Drive,
 Scoresby, Australia 3179
 Ph: +61 3 9730 9121
 Fax: +61 3 9753 4248
 E-mail: export@davey.com.au
 Website: davey.com.au



This literature is not a complete guide to product usage. Further information is available from your Davey dealer, Davey Customer Service Centre and from the relevant product Installation and Operating Instructions. This data sheet must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice.
 © Davey is a registered trademark of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2012.