



Experts in water.

DAVEY

APPLICATIONS

Ideal for pumping clean, non-volatile liquids without fibres or solids in such applications as:-

- Domestic water supply
- Irrigation
- Water transfer
- Washing systems
- Pressure boosting

WHY CHOOSE DAVEY XF Pumps?

PUMP

Single impeller design.

Closed vane 304 stainless steel impellers.

Patented independently floating neck ring.

316 stainless steel pump shaft.

304 stainless steel casing.

Mechanical shaft seal.

O-ring casing seal.

MOTOR

2 pole, 50Hz, 220-240V single phase.

TEFC motor is powder coated for high corrosion resistance and prevents dust and dirt ingress.

Environmentally friendly manufacturing process as powder coatings emit near zero volatile organic compounds and produces less hazardous waste than conventional paint coatings.

Class F insulation.

Permanently split capacitor design.

Protected against both high operating temperature and high current by a built-in automatically resetting thermal overload.

BENEFITS

Manufactured from quality corrosion resistant materials.

Motor and pump designed for frequent starts.

Quick and easy installation.

Low maintenance.

Easy to service if required.



XF Series

Model Numbers:

XF111SS, XF211SS & XF311SS


Australian made, robust and compact, single-stage stainless steel centrifugal pump, driven by a powder coated, TEFC motor. Designed for total head duties to 36m and flows to 215 lpm.



OPERATING LIMITS			
Model	XF111SS	XF211SS	XF311SS
Capacities to (lpm)	175	200	215
Maximum total head (m)	27	30	36
Maximum suction head (m)	7.0		
Max. water temperature continuous	+85°C		
Minimum water temperature	-15°C		
Maximum ambient temperature	55°C		
Inlet size BSP (F)	1¼"		
Outlet size BSP (F)	1"		
Maximum pump casing pressure (kPa)	800		

MATERIALS OF CONSTRUCTION	
Part	Material
Impellers	304 stainless steel
Lock nut	304 stainless steel
Pump casing	304 stainless steel
Pump shaft	316 stainless steel
Seal ring (stationary)	Ceramic
Seal ring (rotating)	Carbon
Seal spring	304 stainless steel
Orings	Nitrile rubber
Diffuser	304 stainless steel
Neckring	Glass filled polypropylene
Motor shell	Aluminium
Shell finish	Polyester

ELECTRICAL DATA			
Model	XF111SS	XF211SS	XF311SS
Nominal rpm	2900		
Volts/hertz/phase	220-240/50/1		
IP rating/insulation	55/Class F		
Amps	4.90	5.40	7.30
kW (P ₁)/(P ₂)	1.10/0.75	1.30/0.90	1.70/1.10
hp (P ₁)/(P ₂)	1.50/1.00	1.73/1.20	2.30/1.50

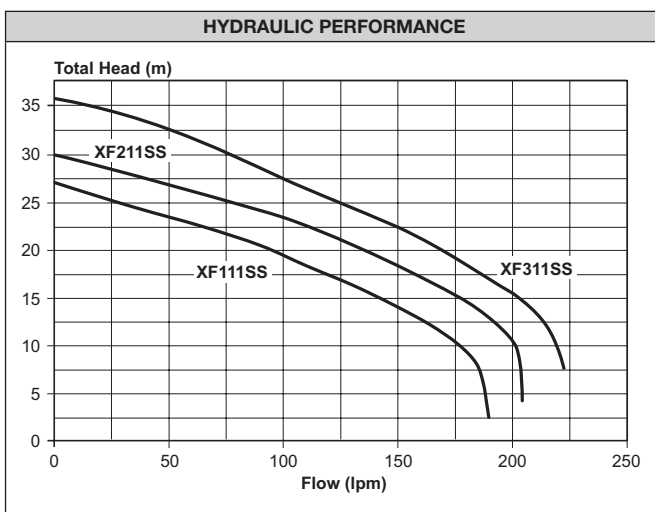

INSTALLATION AND PRIMING

- Installations with suction lift require a good quality foot valve to avoid loss of prime.
- To prime, fill pump body and suction line through priming plug hole located above suction inlet and replace plug.

DIMENSIONS (mm)																	
XF111SS & XF211SS										XF311SS							
Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	Net Weight kg	
XF111SS	232	345	135	88	52	1"	1¼"	124	107	213	52	37.5	11	140	170.5	10.0	
XF211SS	232	345	135	88	52	1"	1¼"	124	107	213	52	37.5	11	140	170.5	11.0	
XF311SS	260	410	176	97	51	1"	1¼"	139	121	240	60	39.0	9	140	180.0	14.5	



davey.com.au

This literature is not a complete guide to product usage. Further information is available from your Davey Dealer, Davey Support Centre and from the relevant product Installation and Operating Instructions. Must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice.
 © Davey is a registered trademark of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2014.