



water solutions




## Electrical submersible pumps

- steel
- blue
- bluePRO
- E Series



## Lifting stations

- nanoBOX
- blueBOX

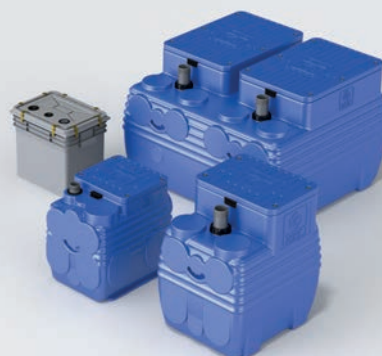

## Hydraulic accessories



## Electrical accessories



EN  
60 Hz





## Find your Zenit solution for domestic market

All Zenit products are designed with the same mission in mind: to satisfy our customers' needs.



# INDEX

Welcome to ZENIT	4
About us	6
Our organisation	8
Domestic applications	9
Electrical submersible pumps	14
Lifting stations	62
Accessories	74
ZENO Navigator Suite	86
Our values	88
Product overview	90



water solutions



WE STRIVE TO PARTNER WITH YOU IN  
YOUR SEARCH FOR WATER TREATMENT  
SOLUTION AND RELATED SERVICE

# Welcome to ZENIT

We strive to partner with you in your search for water treatment solutions and related services.

With our extensive experience and cutting edge technology, we believe we are the ideal partner in this journey towards achieving the most suitable and competitive water solution.

Indeed, our motto 'water solutions' defines what we do.

Our technological know-how in water treatment processes has constantly improved with time because we are adaptable and capable of further growth and transformation.

Innovation is the backbone of our business.

This is why we can proudly say that historical authenticity and dynamism are our most distinctive features: they reflect our origins and set our future goals.

In Zenit, we promote and support a creative and gratifying work environment that generates ideas and solutions capable of meeting any request coming from the market as well as our partners.

Through sustainable production processes and company strategies, we offer reliable products to simplify and improve the work of the final user.

Trust and integrity are the cornerstone of our relationships with suppliers, customers and employees.


Our company is founded on the simple principle of maximizing human resources for innovation, design and technology.

## Zenit Board of Directors



Left to right:  
Lorenzo Botton  
Massimiliano Volta  
Davide Botton

(Zenit BOD)

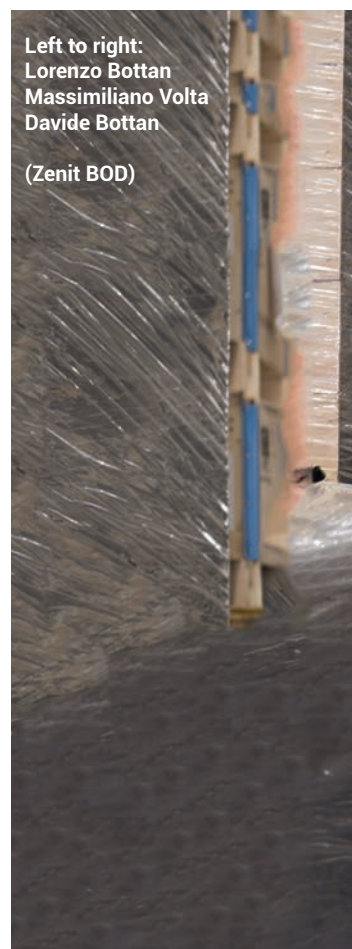





## Zenit's headquarters

Zenit Group's main production plant is in Italy. It is also the centre of research and innovation.





## About us

Zenit's history began more than 60 years ago in a small engineering workshop in Modena.

Today, it has grown into a company with strong international presence, supported by hundreds of loyal employees, partners and associates all over the world.

We have grown organically thanks to talented and dedicated individuals who are veritable experts in their respective fields in the design and manufacture of wastewater treatment technology.

Our origin as a family business has contributed to our continual emphasis on incisive and quick decision-making.

This philosophy continues today in our large investment in human resources which remains an important priority for us.

Our dedicated stakeholders ensure that we remain at the top of our abilities and we offer our customers nothing short of product and service excellence.

Our respectable growth in recent years has seen the establishment of a greater international presence with the setting up of subsidiaries and offices abroad.

This international expansion is driven by our desire to serve our customers better with closer proximity.

We are different from our competitors because we put our customers' needs before all else and our strategies for growth are shaped according to their needs, first and foremost.

ZENIT IS AWARE OF  
THE IMPORTANCE  
OF CUSTOMER  
SATISFACTION





## What we do

Our core business is the design, manufacture and distribution of electric submersible pumps for residential and industrial use.

Through constant acquisition of new technological know-how and skills our product range is constantly being improved, refined and broadened.

We offer a wide range of lifting stations, aeration, mixing products, control and monitoring devices.

We also provide complete packages of water treatment solutions with their respective complementary services.

We are capable of taking on the most demanding challenges.


## How we operate

A customer-oriented approach, a penchant for innovation and specialisation are the salient qualities that have led us to constant growth.

We believe in being there for our customers when they need us.

We support and work alongside you in all phases of your projects, from the initial consultation to product/plant design and then to implementation with intensive supervision and finally to a complete and comprehensive after-sales service.

To us, our customers are our topmost priority.

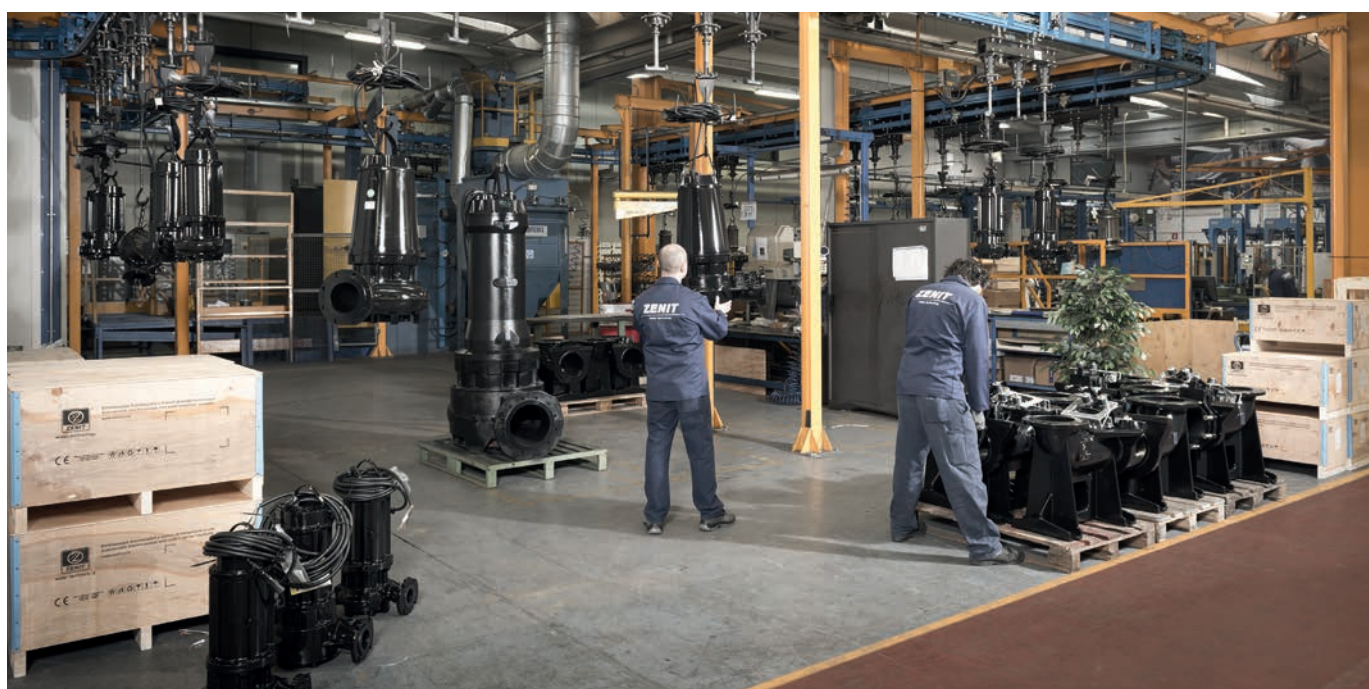



**Modena**  
Italy



**Bascharage**  
Luxembourg



**Suzhou**  
China



**Singapore**  
Singapore

## Our Organisation

Zenit is a company with international presence. We manage our customers' needs directly thanks to our territorial access to the world.

The current structure of Zenit Group is the result of entrepreneurial strategies and insights that have enabled its internationalisation.

Zenit Group is composed of different units, which manufacture and distribute wastewater treatment products across the globe, each of them with its own organisation but all operating in pursuit of a shared goal.

ZENIT GROUP IS THE  
RESULT OF A SUCCESSFUL  
COMBINATION OF  
ENTREPRENEURIAL  
STRATEGIES AND INSIGHTS



# Domestic applications

Zenit is a company where the customer's needs are listened to, analysed, understood and implemented with genuine solutions.







## The solution for you

OUR CUSTOMERS ARE  
LOYAL TO US BECAUSE  
EVERYTHING WE DO IS  
FOR THEM

Zenit offers:

- A wide range of customised solutions for industrial, domestic and civil plants.
- Products that adapt to challenging conditions minimizing implementation as well as running costs, yet maintaining efficiency.
- Standardised components and spare parts for faster and lower after sales-service cost.
- Complete pre and after-sales service to enhance your experience with us, as we thrive on the relationship with our customers, built on trust and integrity.




## PRODUCT VALUES



### TRADITION

Domestic sector leader since 1958.

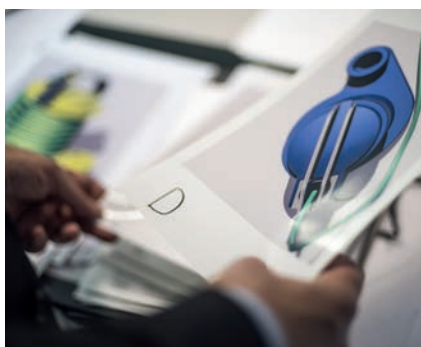

### ITALIAN DESIGN AND TECHNOLOGY

Constant creative effort in the drive for improvement.



### CARE AND EXPERIENCE

Attention to every detail, efficient, dynamic pre- and after-sales service





# Fields of application

In domestic and residential plumbing systems, the presence of various types of landscapes means that a wide range of compatible products is essential to counter any elevation of or depression in the site. Collection tanks and submersible pumps are normally used in the storage, lifting and disposal of liquid waste.


The products we offer minimize installation time which in turn reduces installation costs.

We make sure that our company works with you for the entire process from consulting to implementation to further save on costs and time.

To meet these needs Zenit, with more than sixty years' experience in the water treatment sector, has created an offering of electric pumps and lifting stations suitable for domestic and residential applications, even in the harshest and most adverse conditions.

These products are made with reliable and durable material of superior quality, built to suit any type of landscape.

They come with a wide range of accessories which enhance and complement their functions.

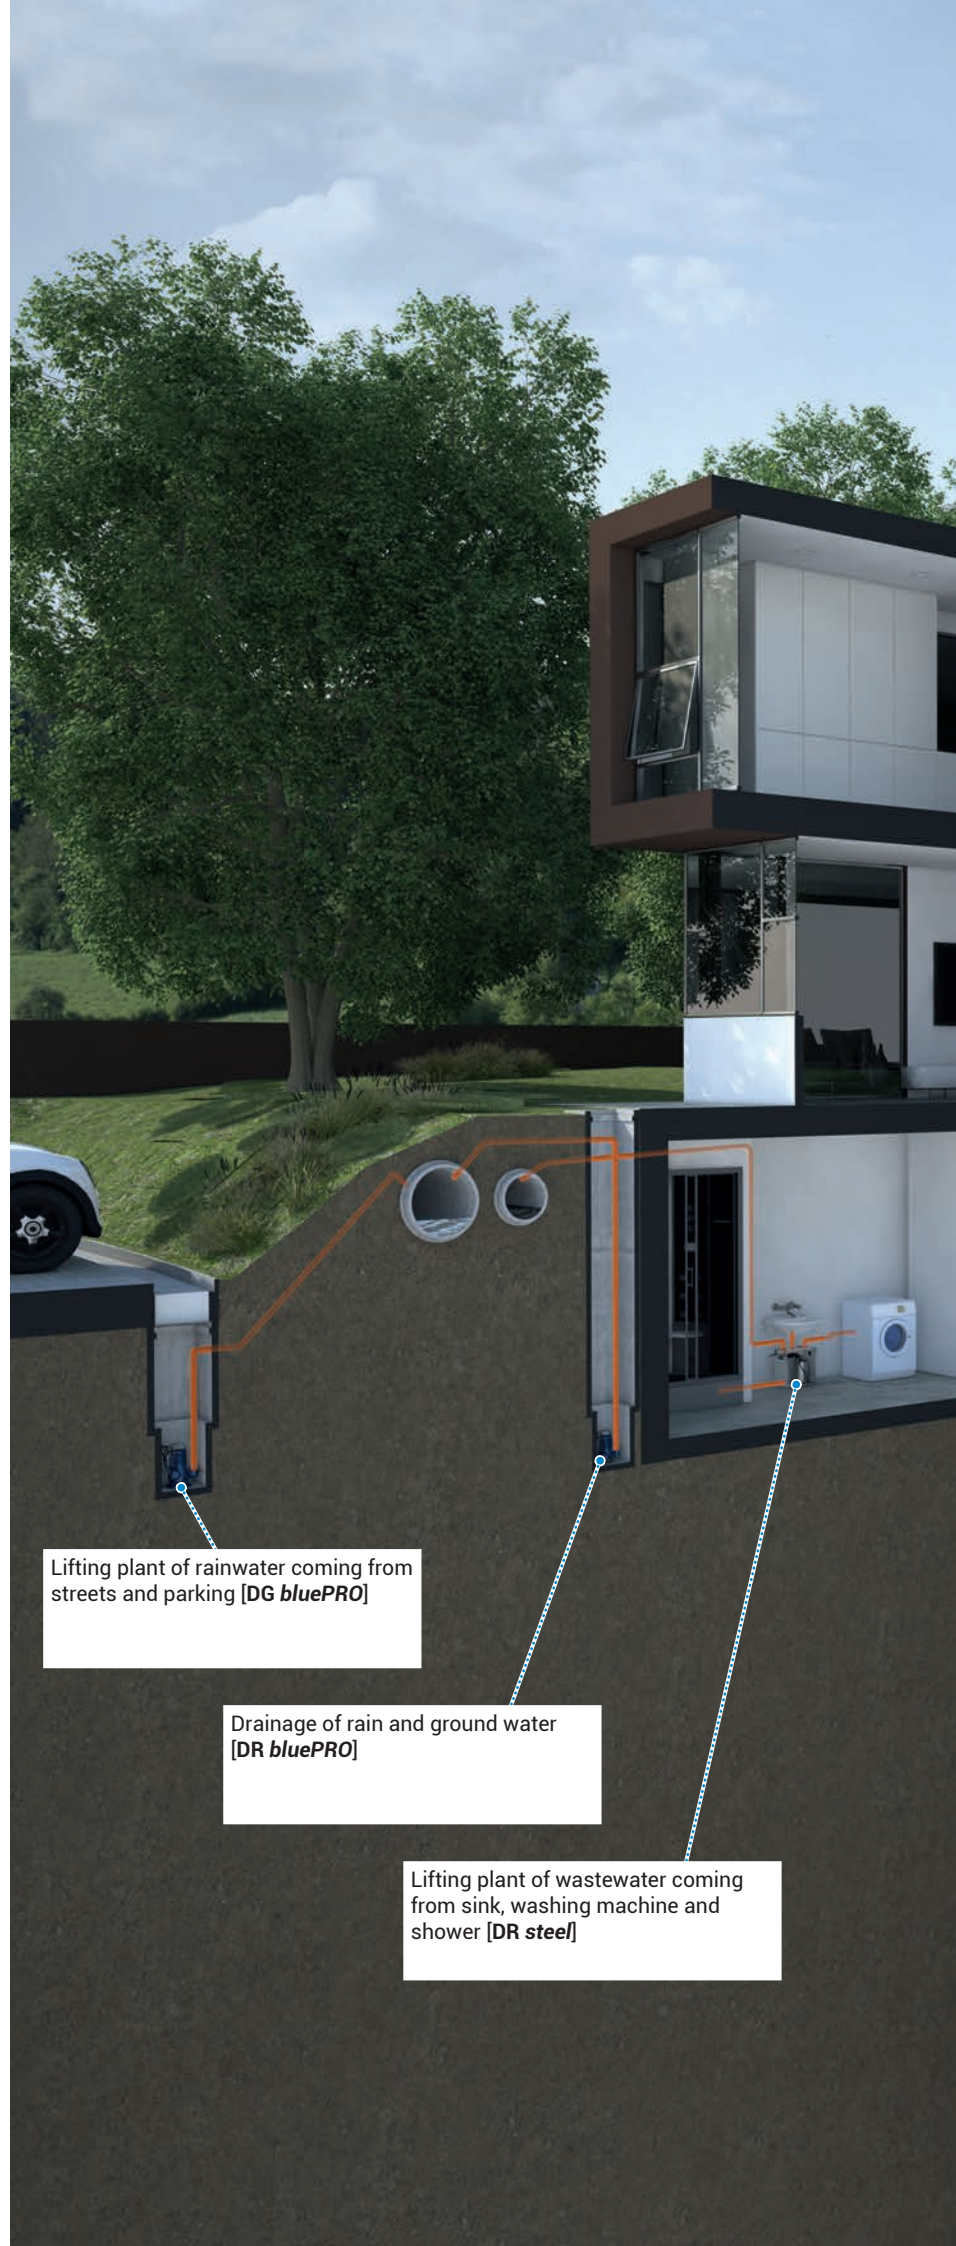





Pump for emergency emptying of flooded cellar or garage [DR steel]

Lifting plant of water from underground rooms [DR blue]

Collecting and pumping of wastewater from WC installed at a lower level than the sewer (*blueBOX* with *DG blue* / *GR bluePRO*)

# ZENIT

## PRODUCT RANGE

- » **Electrical submersible pumps**
- » Lifting stations
- » Accessories





# Electrical submersible pumps

*steel • blue • bluePRO • E Series*



# Series

# steel



Stainless steel electrical submersible pumps.  
Dry motor with power from 0.25 to 0.75 kW

	DG	DR
<b>Pump material</b>		
Cast iron	-	-
Pressed steel	●	●
<b>Impeller material</b>		
Cast iron	-	-
Pressed steel	●	●
Techno-polymer	-	-
<b>Type of hydraulics</b>		
Hydraulics for clear wastewaters with suction strainer	-	●
Vortex hydraulics for wastewaters with solid bodies	●	-
High pressure hydraulics with suction strainer	-	-
High pressure hydraulics with grinding system	-	-
<b>Discharge</b>		
Vertical discharge	●	●
Horizontal discharge	-	-
<b>Phases</b>		
Single-phase	●	●
Three-phase	●	●
<b>Submerged or dry installation</b>		
Pumps for submerged installation only	●	●
Pumps with cooling jacket as standard	●	●
<b>Specific certifications</b>		
IECEX / SASO / ATEX	SASO	

MACHINERY DIRECTIVE 2006/42/EC  
 LOW VOLTAGE DIRECTIVE 2006/95/EC (until 19.04.2016) - 2014/35/UE (from 20.04.2016)  
 ELECTROMAGNETIC COMPATIBILITY DIRECTIVE (until 19.04.2016) - 2014/30/UE (from 20.04.2016)  
 Standards applied: EN ISO 12100:2010; IEC 60529:2013; IEC 60034-1:2010; ISO 9906:2012; EN 60204-1:2006; UNI EN 809:2009.  
 For single-phase electrical submersible pumps only: IEC 60335-1:2013; IEC 60335-2-41:2012.





Cast iron electrical submersible pumps.  
Dry motor with power from 0.3 to 0.74 kW

DG	DR
●	●
-	-
-	-
-	-
●	●
-	●
●	-
-	-
-	-
●	●
-	-
●	●
-	-
●	●
-	-
ICEX / SASO / ATEX	



Cast iron electrical submersible pumps.  
Dry motor with power from 0.37 to 1.5 kW

DG	DR	GR	AP
●	●	●	●
-	-	-	-
●	●	●	●
-	-	-	-
-	-	-	-
-	●	-	-
●	-	-	-
-	-	-	●
-	-	●	-
●	●	-	-
-	-	●	●
●	●	●	●
●	●	●	●
●	●	●	●
-	-	-	-
ICEX / SASO / ATEX			



Cast iron electrical submersible pumps.  
Dry motor with power from 0.37 to 1.5 kW

DG	DR
●	●
-	-
●	●
-	-
-	-
-	●
●	-
-	-
-	-
●	●
-	●
●	●
●	●
●	●
-	-
SASO	

# steel Series

High-performance, compact stainless steel submersible pumps for optimal service in household installations and small civil plants.

Two different types of hydraulics are available for the maximum flexibility: DRENO (**DR steel**) with multi-channel open impeller for applications with clear or slightly soiled wastewaters; and DRAGA (**DG steel**) impeller for applications with heavily soiled wastewaters and solid bodies, thanks to the free passage of up to 40 mm.

The cooling system allows these pumps to be used even when only partially submerged and in particular the **DR steel** version is easily converted into a dry floor pump, with suction levels as little as 5 mm above


the ground.

Every model undergoes pressurised testing to guarantee perfect assembly and operation of the gaskets, cable gland and mechanical seals.

Thanks to their convenience and ease of handling, steel models can also be used in emergencies for pumping-out flooding premises or for temporary installations for pumping from wells and tanks.

What's more, the **DR steel** version also provides an excellent lifting station installed inside the **nanoBOX** tank for the collection and transfer of domestic wastewaters.

## Operating ranges

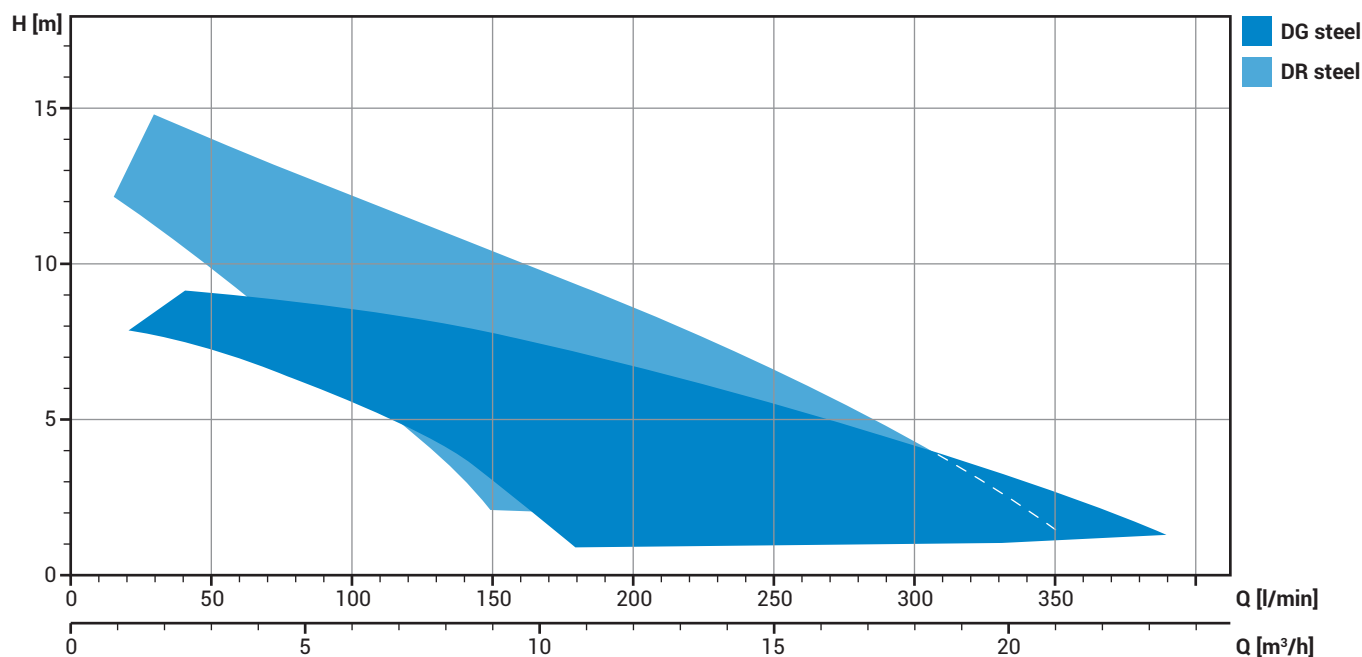

## Construction materials

Case	Stainless steel - AISI 304
Impeller	Stainless steel - AISI 304
Nuts and bolts	Stainless steel - Class A2-70
Standard gasket	Rubber - NBR
Shaft	Stainless steel - AISI 431

## Operating specifications

Max operating temperature	40°C [90°C max 3 min]
pH of treated fluid	6 ÷ 14
Viscosity of treated fluid	1 mm²/s
Maximum immersion depth	10 m
Density of treated fluid	1 Kg/dm³
Maximum acoustic pressure	<70 dB
Max starts per hour	30


The data provided are not binding.  
Zenit reserves the right to modify the product without advance notification.



## DG *steel*



### DG [DRAGA]



- Stainless steel vortex impeller
- Large free passage

- Sewage
- Soiled wastewaters with solids
- Lifting stations in small civil plants

## DR *steel*



### DR [DRENO]



- Stainless steel multi-channel open impeller
- Stainless steel suction strainer

- Clear or slightly soiled wastewaters
- Pumping-out flooded premises
- Garden sprinklers and pumping from tanks

## Range characteristics

<b>Power supply</b>	220/240V ~1 - 380/400V ~3	
<b>Frequency</b>	60 Hz	
<b>Power</b>	0.37 ÷ 0.75 kW	
<b>Poles</b>	2	
<b>Discharge</b>	<b>vertical</b>	G 1¼" - G 1½"
	<b>horizontal</b>	-
<b>Free passage</b>	max 40 mm	
<b>Max flow rate</b>	390 l/min	
<b>Max head</b>	9.2 m	

<b>Power supply</b>	220/240V ~1 - 380/400V ~3	
<b>Frequency</b>	60 Hz	
<b>Power</b>	0.25 ÷ 0.75 kW	
<b>Poles</b>	2	
<b>Discharge</b>	<b>vertical</b>	G 1¼" - G 1½"
	<b>horizontal</b>	-
<b>Free passage</b>	max 12 mm	
<b>Max flow rate</b>	350 l/min	
<b>Max head</b>	14.7 m	



# steel Series



## HANDLE

In AISI 304 stainless steel with ergonomic, insulating technopolymer coating.

## ADJUSTABLE FLOAT SWITCH

Float switch stroke adjustment system for modification of start-stop levels.


## CABLE GLAND

Cable gland system with dual safety device to prevent disconnection even in case of accidental pulling.



## HOSE CONNECTOR [DR steel 25 - 37]

Handy hose connector included. The ring-nut allows easy disconnection of the pump from the discharge line.



## FREE PASSAGE [DG steel]

Free passage up to 40 mm.



## SLIDING VERTICAL FLOAT SWITCH [Optional]

The float switch stroke can be adjusted to modify the start/stop level and optimise operation. The vertical travel level switch is available for installation in small pits.

## Highlight



## COOLING SYSTEM

The cooling jacket ensures an optimal motor temperature even with the pump only partially submerged.

# steel Series

## CAPACITOR/RELAY

Single-phase models have internal capacitor.  
Three-phase models have relay for float-switch control of start/stop cycles.

## DRIVE SHAFT

Integral drive shaft in AISI 431 stainless steel for high strength and to allow use with brine or chlorine.

## THERMAL PROTECTION

Dry motor protection with thermal overload.

## MECHANICAL SEALS

Double silicon carbide seal in oil chamber with food-grade oil lubrication.

## V-RING

The V-Ring in direct contact with the liquid protects the mechanical seals from foreign bodies to keep them in good working condition.

## IMPELLER

In AISI 304 stainless steel.

## OIL CHAMBER

Large oil chamber guarantees long mechanical seal lifetime.

## STRAINER [DR steel]


The DR steel easily converts from an ordinary submersible pump to a dry floor unit. When operating in this mode, the suction level can be reduced to as little as 5 mm above the ground.



## Models with vertical threaded discharge [GAS 1¼" - GAS 1½"] - 2 poles

### Performances



	l/s	0	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
	l/min	0	30	60	90	120	150	180	210	240	270	300	330	360
	m³/h	0	1.8	3.6	5.4	7.2	9.0	10.8	12.7	14.5	16.3	18.1	19.9	21.7
① DG steel 37/2 M60		8.6	7.8	7.1	6.1	5.0	3.4	1.3						
② DG steel 55/2 M60		8.1	7.8	7.5	7.0	6.6	6.2	5.7	4.9	4.1	3.3	2.4	1.5	
③ DG steel 75/2 M[T]60		9.6	9.3	9.0	8.7	8.4	7.9	7.3	6.6	5.9	5.2	4.5	3.6	2.7

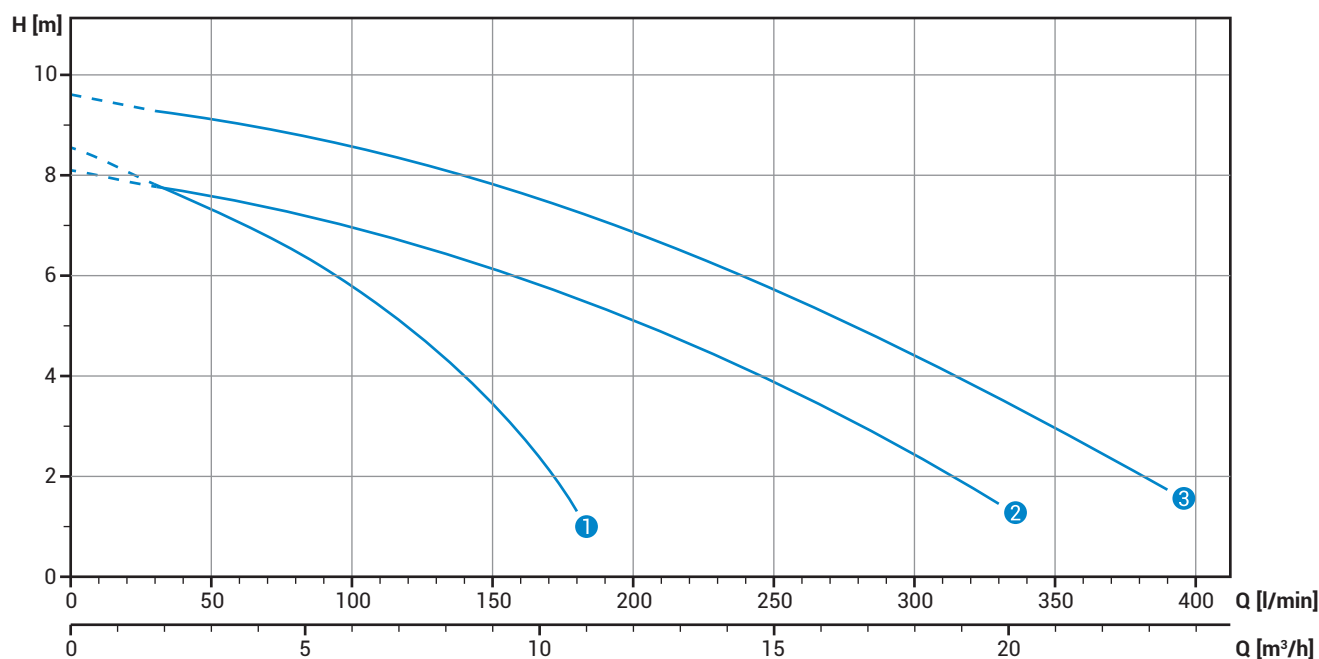


### Technical data

	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Ø	Free passage
① DG steel 37/2 M60	230	1	-	0.37	3.1	3480	G 1¼"	25 mm
② DG steel 55/2 M60	230	1	-	0.55	4.3	3480	G 1½"	40 mm
③ DG steel 75/2 M60	230	1	-	0.75	5.6	3480	G 1½"	40 mm
③ DG steel 75/2 T60	400	3	-	0.75	2.4	3480	G 1½"	40 mm


## Dimensions

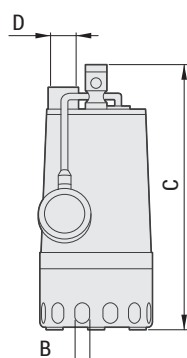

### STANDARD FLOAT SWITCH



### SLIDING VERTICAL FLOAT SWITCH



Overall dimensions (mm)

	A	B	C	D	H	L	M	H1	L1	M1	kg	X	Y	Z	Pieces per pallet 1000x1200 mm
DG steel 37/2 M60	170	20	350	G 1 1/4"	435	195	350	205	115	300	6.6	200	200	400	90 (30x3) 60 (20x3)
DG steel 55/2 M60	170	40	400	G 1 1/2"	450	200	400	250	140	350	8.1	240	250	470	60 (20x3) 60 (20x3)
DG steel 75/2 M60	210	40	400	G 1 1/2"	450	200	400	250	140	350	8.9	240	250	470	60 (20x3) 60 (20x3)
DG steel 75/2 T60	210	40	400	G 1 1/2"	450	200	400	250	140	350	8.9	240	250	470	60 (20x3) 60 (20x3)

M - M1 Minimum dimensions. Suggested dimensions 500mm x 500mm

## Versions

### Single-phase models

TCG Thermal protection, capacitor, float switch

TCW Thermal protection, capacitor, capacitor, travel float switch

### Three-phase models

NAE No electric accessory


TRG Thermal protection, relay for motor protection, float switch

## Packaging




The rugged cardboard box packaging fulfils two functions: it protects the product in transit, thanks to the thickness of the board used and expanded polyurethane padding, and also provides key information about the pump's use and performance data, printed clearly and legibly in colour. Pumps are supplied complete with all the documentation required by European standards and a copy of the duty dataplate on a silvered decal that can be affixed to the manual to ensure the availability of all the most useful data (serial number, power rating, etc.) at all times.

## Installations



FREE




FIXED



## Models with vertical threaded discharge [GAS 1¼" - GAS 1½"] - 2 poles

### Performances



	l/s	0	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5
	l/min	0	30	60	90	120	150	180	210	240	270	300	330
	m³/h	0	1.8	3.6	5.4	7.2	9.0	10.8	12.7	14.5	16.3	18.1	19.9
① DR steel 25/2 M60		8.6	7.0	5.6	4.0	1.8							
② DR steel 37/2 M60		13.0	11.3	9.2	7.0	4.8	2.2						
③ DR steel 55/2 M60		12.3	11.3	10.3	9.3	8.4	7.3	6.2	5.0	4.0	3.0	1.8	
④ DR steel 75/2 M[T]60		16.0	14.8	13.6	12.6	11.5	10.4	9.4	8.3	7.1	5.9	4.4	2.7

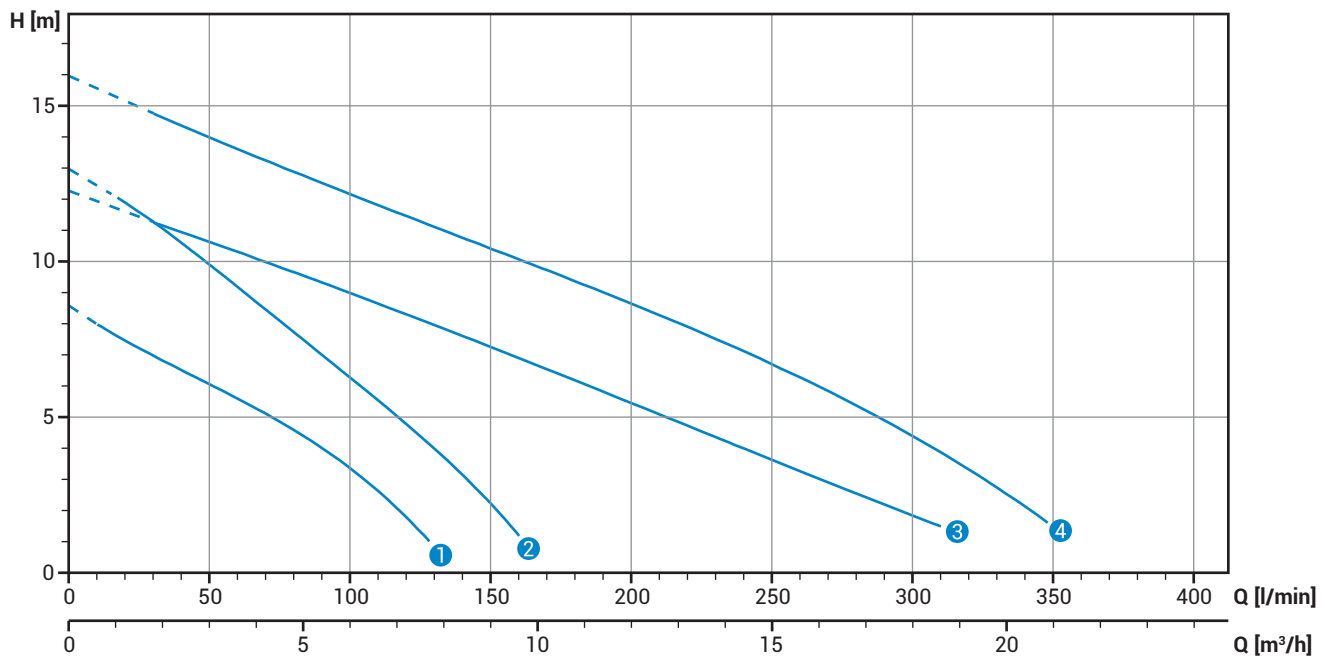


### Technical data

	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Ø	Free passage
① DR steel 25/2 M60	230	1	-	0.25	2.3	3480	G 1¼"	10 mm
② DR steel 37/2 M60	230	1	-	0.37	3.1	3480	G 1¼"	10 mm
③ DR steel 55/2 M60	230	1	-	0.55	4.3	3480	G 1½"	12 mm
④ DG steel 75/2 M60	230	1	-	0.75	5.6	3480	G 1½"	12 mm
④ DG steel 75/2 T60	400	3	-	0.75	2.4	3480	G 1½"	12 mm


## Dimensions



### STANDARD FLOAT SWITCH



### SLIDING VERTICAL FLOAT SWITCH



Overall dimensions (mm)

	A	B	C	D	H	L	M	H1	L1	M1	kg	X	Y	Z	Pieces per pallet 1000x1200 mm
DR steel 25/2 M60	170	10	300	G 1 1/4"	385	145	350	155	65	300	5.9	200	200	350	90 (30x3) 60 (20x3)
DR steel 37/2 M60	170	10	300	G 1 1/4"	385	145	350	155	65	300	6.3	240	250	400	90 (30x3) 60 (20x3)
DR steel 55/2 M60	215	12	335	G 1 1/2"	420	180	400	190	100	350	7.7	240	250	400	60 (20x3) 60 (20x3)
DR steel 75/2 M[T]60	215	12	335	G 1 1/2"	420	180	400	190	100	350	8.4	240	250	400	60 (20x3) 60 (20x3)

M - M1 Minimum dimensions. Suggested dimensions 500mm x 500mm

## Versions

### Single-phase models

- TCG Thermal protection, capacitor, float switch
- TCW Thermal protection, capacitor, capacitor, travel float switch
- TR Thermal protection, relay for motor protection

### Three-phase models


- NAE No electric accessory
- TRG Thermal protection, relay for motor protection, float switch

## Packaging




The rugged cardboard box packaging fulfils two functions: it protects the product in transit, thanks to the thickness of the board used and expanded polyurethane padding, and also provides key information about the pump's use and performance data, printed clearly and legibly in colour. Pumps are supplied complete with all the documentation required by European standards and a copy of the duty dataplate on a silvered decal that can be affixed to the manual to ensure the availability of all the most useful data (serial number, power rating, etc.) at all times.

## Installations



FREE



FIXED



# blue Series

The **blue Series** is intended mainly for domestic and residential installations and provides compact size and outstanding reliability.

Versions are available with two different hydraulics: DRENO (**DR blue**), with multi-channel open impeller for clear or slightly soiled wastewaters; and DRAGA (**DG blue**), with vortex impeller and large free passage for pumping wastewaters with heavy soil, for use with **blueBOX** lifting stations.

Meticulous design and the use of high-grade materials allow easy maintenance and make the replacement of parts subject to wear simple and

less frequent than on other models in the same price band.


Every model undergoes pressurised testing to guarantee perfect assembly and operation of the gaskets, cable gland and mechanical seals.

**blue Series** pumps are rugged and reliable, suitable for permanent installations yet also, thanks to their convenience and ease of handling, ideal for emergency use for pumping-out flooding premises or for temporary installations for pumping from wells and tanks.

Models available in ATEX/IECEx certified version

II 3G k Ex nA IIC T3 Gc  
II 3G k Ex nA nC IIC T3 Gc

## Operating ranges

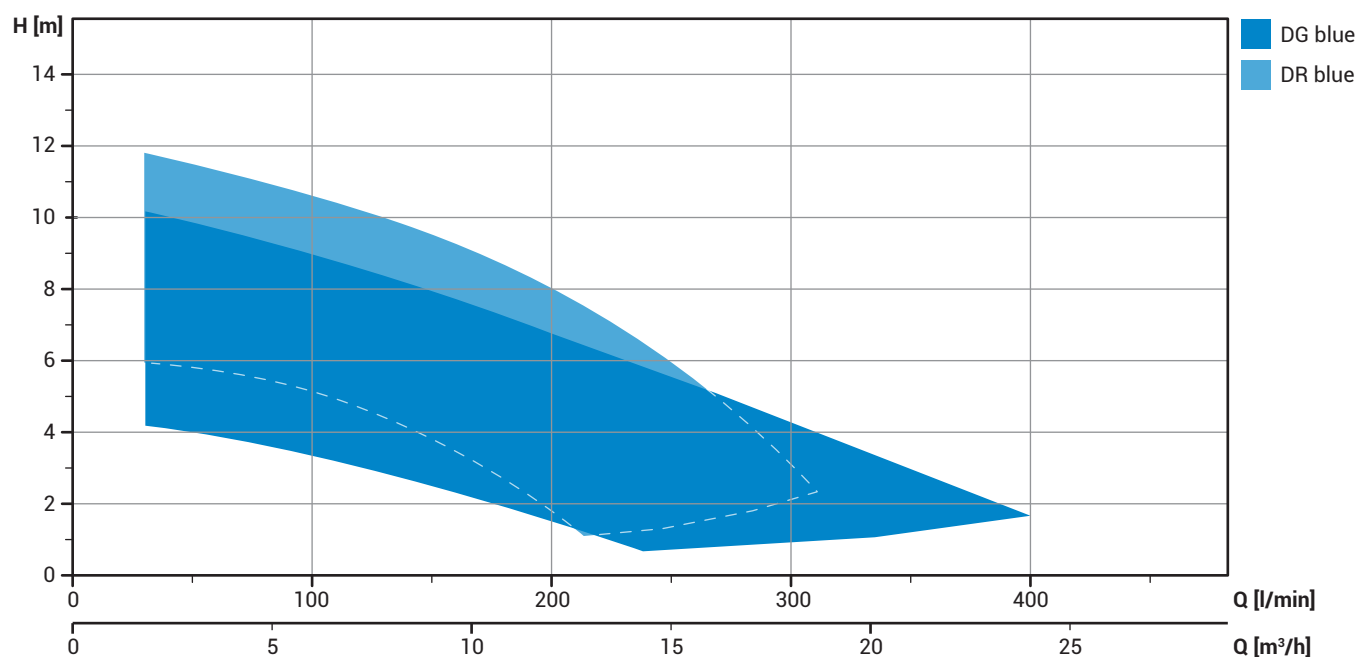

## Construction materials

Case	Cast iron EN-GJL-250
Impeller	Techno-polymer
Nuts and bolts	Stainless steel - Class A2-70
Standard gasket	Rubber - NBR
Shaft	Stainless steel - AISI 431
Paint type	Ecological bicomponent epoxy (medium thickness 80 µm)

## Operating specifications

Max operating temperature	40°C [90°C max 3 min]
pH of treated fluid	6 ÷ 14
Viscosity of treated fluid	1 mm²/s
Maximum immersion depth	20 m
Density of treated fluid	1 Kg/dm³
Maximum acoustic pressure	<70 dB
Max starts per hour	30

The data provided are not binding.  
Zenit reserves the right to modify the product without advance notification.

## DG *blue*



### DG [DRAGA]



- Techno-polymer vortex impeller
- Full free passage

- Sewage
- Soiled wastewaters with solids
- Lifting stations in small civil and residential plants

## DR *blue*



### DR [DRENO]



- Techno-polymer multi-channel open impeller
- Techno-polymer suction strainer

- Clear or slightly soiled wastewaters
- Strained, seepage and underground pump-out waters
- Irrigation and pumping from wells and reservoirs

## Range characteristics

Power supply	220/240V ~1
Frequency	60 Hz
Power	0.3 ÷ 0.74 kW
Poles	2
Discharge	vertical G 1½"
	horizontal -
Free passage	40 mm
Max flow rate	401 l/min
Max head	10.2 m

Power supply	220/240V ~1
Frequency	60 Hz
Power	0.3 ÷ 0.74 kW
Poles	2
Discharge	vertical G 1¼"
	horizontal -
Free passage	7 mm
Max flow rate	311 l/min
Max head	11.8 m



# blue Series



## HANDLE

Ergonomic handle styled for optimal grip. Shaped to take a shackle to hold the pump steady during handling.



## ADJUSTABLE FLOAT SWITCH

Float switch stroke adjustment system for modification of start-stop levels.




## CABLE GLAND

Innovative cable gland system with cable holder system and twin O-rings to ensure maximum tightness. Simpler extraction for maintenance.

## CAPACITOR

Single-phase models have internal capacitor.



## CASE

EN-GJL-250 cast iron construction guarantees solidity and durability even in case of maintenance requiring removal and replacement of the motor.

## Highlight



## EASY MAINTENANCE

During the design phase, special care was taken over the choice of components and materials, not only to ensure excellent quality but also to simplify routine maintenance and allow any repairs to be carried out using commercially available tools.


This makes the **blue Series** quicker and easier to maintain than competitor models.

# blue Series



## PRESSURISED TESTING

Stud bolt for closing the motor compartment for the pressurised testing every model undergoes.



## MECHANICAL SEALS

One mechanical seal in silicon carbide (SiC) and one mechanical seal in alumina graphite (AL), both in oil chamber.




## V-RING

The V-Ring in direct contact with the liquid protects the mechanical seals from foreign bodies to keep them in good working condition.




## OIL CHAMBER

Guarantees longer mechanical seal lifetime and is easily accessible thanks to a patented system to simplify maintenance procedures.




## FREE PASSAGE [DG blue]

Full free passage allowing the expulsion of solids of 40 mm and preventing fouling of the impeller.



## ANTI-CLOGGING SYSTEM [DR blue]

Stainless steel diffuser plate. Ensures the expulsion of small suspended solids and prevents fouling of the impeller.






# DG *blue*

Models with vertical threaded discharge [GAS 1½"] - 2 poles

## Performances


	l/s	0	1	2	3	4	5	6
	l/min	0	60	120	180	240	300	360
	m³/h	0	3.6	7.2	10.8	14.4	18.0	21.6
① DG blue 40/2/G40V A1BM6		4.4	3.9	3.0	1.9			
② DG blue 50/2/G40V A1BM6		6.0	5.4	4.6	3.4	1.9		
③ DG blue 75/2/G40V A1BM6		8.2	7.4	6.4	5.3	3.9	2.2	
④ DG blue 100/2/G40V A1BM6		10.6	9.7	8.6	7.3	5.8	4.3	2.7

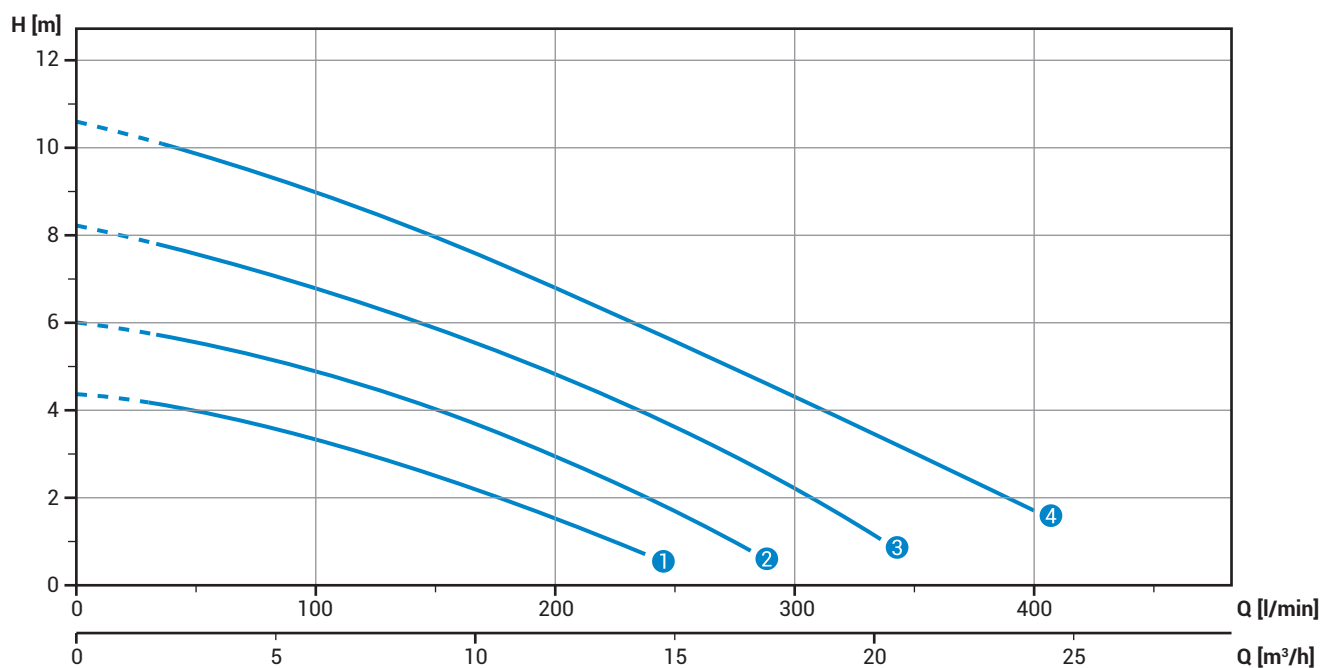



## Technical data

	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Ø	Free passage
① DG blue 40/2/G40V A1BM6	230	1	-	0.30	2.4	3480	G 1½"	40 mm
② DG blue 50/2/G40V A1BM6	230	1	-	0.37	3.1	3480	G 1½"	40 mm
③ DG blue 75/2/G40V A1BM6	230	1	-	0.55	4.2	3480	G 1½"	40 mm
④ DG blue 100/2/G40V A1BM6	230	1	-	0.74	5.6	3480	G 1½"	40 mm
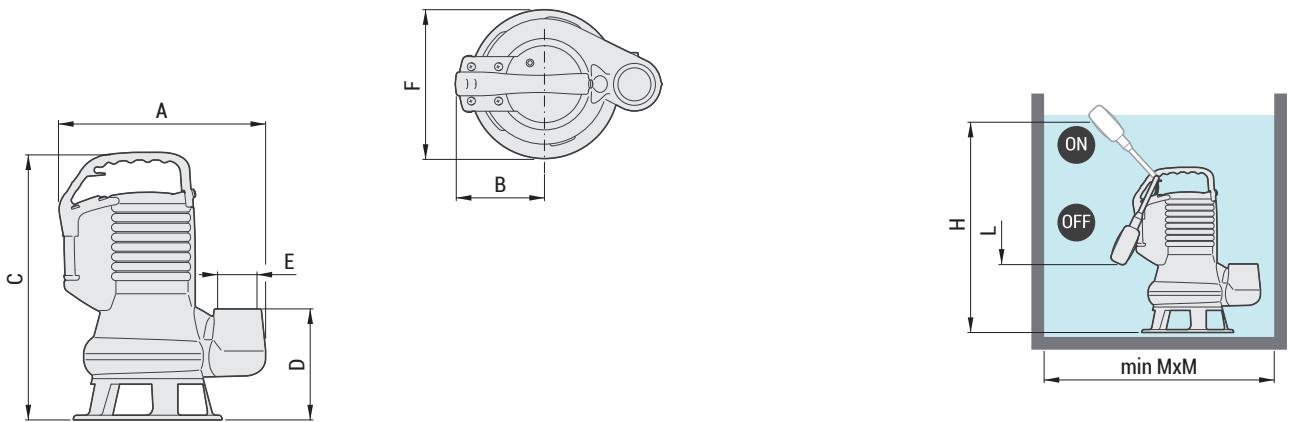
## Dimensions



	Overall dimensions (mm)														Pieces per pallet 1000x1200 mm	
	A	B	C	D	E	F	H	L	M	X		Y	Z			
DG blue 40/2/G40V A1BM6	265	115	335	140	GAS 1½"	190	420	210	300	12.5	200	240	400	75 (25x3)	50 (25x2)	
DG blue 50/2/G40V A1BM6	265	115	335	140	GAS 1½"	190	420	210	300	13	200	240	400	75 (25x3)	50 (25x2)	
DG blue 75/2/G40V A1BM6	265	115	365	140	GAS 1½"	190	450	240	300	15	200	240	400	75 (25x3)	50 (25x2)	
DG blue 100/2/G40V A1BM6	265	115	365	140	GAS 1½"	190	450	240	300	15.5	200	240	400	75 (25x3)	50 (25x2)	

M - Minimum dimensions. Suggested dimensions 500mm x 500mm

## Versions

### Single-phase models

- TC Thermal protection, capacitor
- TCG Thermal protection, capacitor, float switch


## Packaging



The rugged cardboard box packaging fulfils two functions: it protects the product in transit, thanks to the thickness of the board used and expanded polyurethane padding, and also provides key information about the pump's use and performance data, printed clearly and legibly in colour.

Pumps are supplied complete with all the documentation required by European standards and a copy of the duty dataplate on a silvered decal that can be affixed to the manual to ensure the availability of all the most useful data (serial number, power rating, etc.) at all times.

## Installations

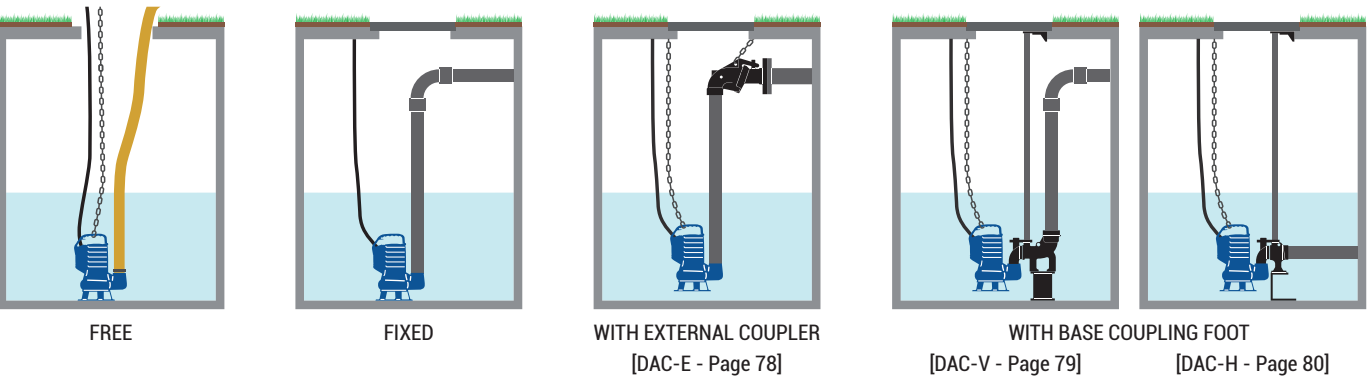




# DR *blue*

Models with vertical threaded discharge [GAS 1¼"] - 2 poles

## Performances


	l/s	0	1	2	3	4	5
	l/min	0	60	120	180	240	300
	m³/h	0	3.6	7.2	10.8	14.4	18.0
① DR blue 40/2/G32V A1BM6		6.2	5.7	4.8	2.8		
② DR blue 50/2/G32V A1BM6		8.0	7.4	6.4	4.8	1.8	
③ DR blue 75/2/G32V A1BM6		11.0	10.1	8.8	7.3	4.9	
④ DR blue 100/2/G32V A1BM6		12.2	11.3	10.2	8.7	6.5	3.2

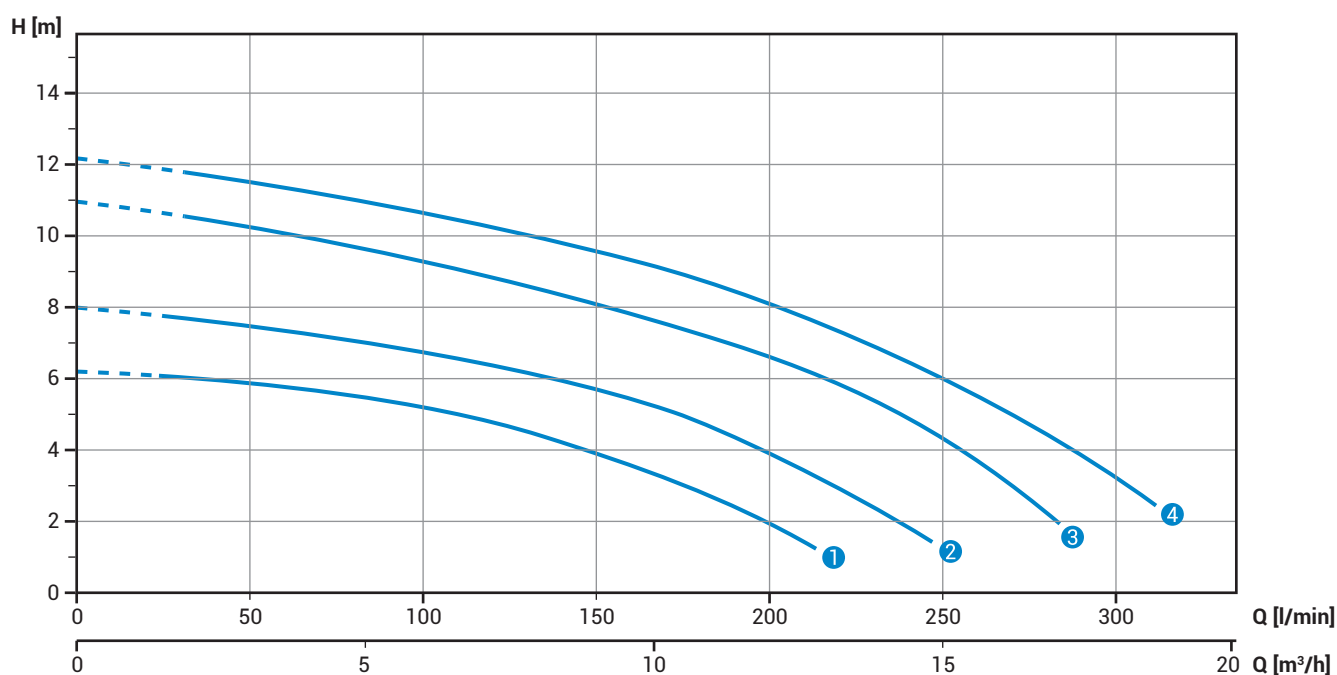



## Technical data

	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Ø	Free passage
① DR blue 40/2/G32V A1BM6	230	1	-	0.30	2.4	3480	G 1¼"	7 mm
② DR blue 50/2/G32V A1BM6	230	1	-	0.37	3.1	3480	G 1¼"	7 mm
③ DR blue 75/2/G32V A1BM6	230	1	-	0.55	4.2	3480	G 1¼"	7 mm
④ DR blue 100/2/G32V A1BM6	230	1	-	0.74	5.6	3480	G 1¼"	7 mm
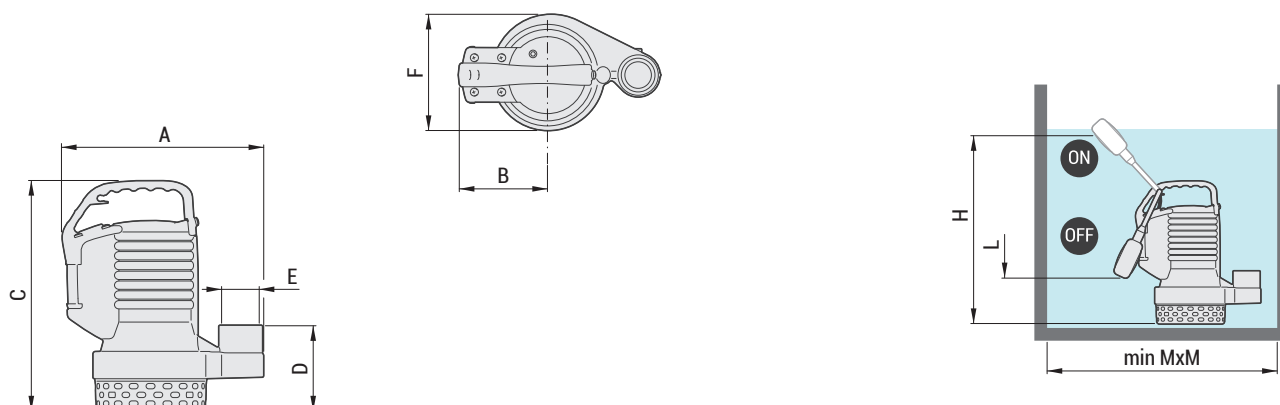
## Dimensions



	Overall dimensions (mm)														Pieces per pallet 1000x1200 mm	
	A	B	C	D	E	F	H	L	M	X		Y	Z			
DR blue 40/2/G32V A1BM6	255	115	295	110	GAS 1 ¼"	150	380	170	300	11.5	200	240	350	75 (25x3)	50 (25x2)	
DR blue 50/2/G32V A1BM6	255	115	295	110	GAS 1 ¼"	150	380	170	300	12	200	240	350	75 (25x3)	50 (25x2)	
DR blue 75/2/G32V A1BM6	255	115	325	110	GAS 1 ¼"	150	410	200	300	13.5	200	240	350	75 (25x3)	50 (25x2)	
DR blue 100/2/G32V A1BM6	255	115	325	110	GAS 1 ¼"	150	410	200	300	15.5	200	240	350	75 (25x3)	50 (25x2)	

M - Minimum dimensions. Suggested dimensions 500mm x 500mm

## Versions

### Single-phase models


TC Thermal protection, capacitor  
TCG Thermal protection, capacitor, float switch

## Packaging



The rugged cardboard box packaging fulfils two functions: it protects the product in transit, thanks to the thickness of the board used and expanded polyurethane padding, and also provides key information about the pump's use and performance data, printed clearly and legibly in colour. Pumps are supplied complete with all the documentation required by European standards and a copy of the duty dataplate on a silvered decal that can be affixed to the manual to ensure the availability of all the most useful data (serial number, power rating, etc.) at all times.

## Installations

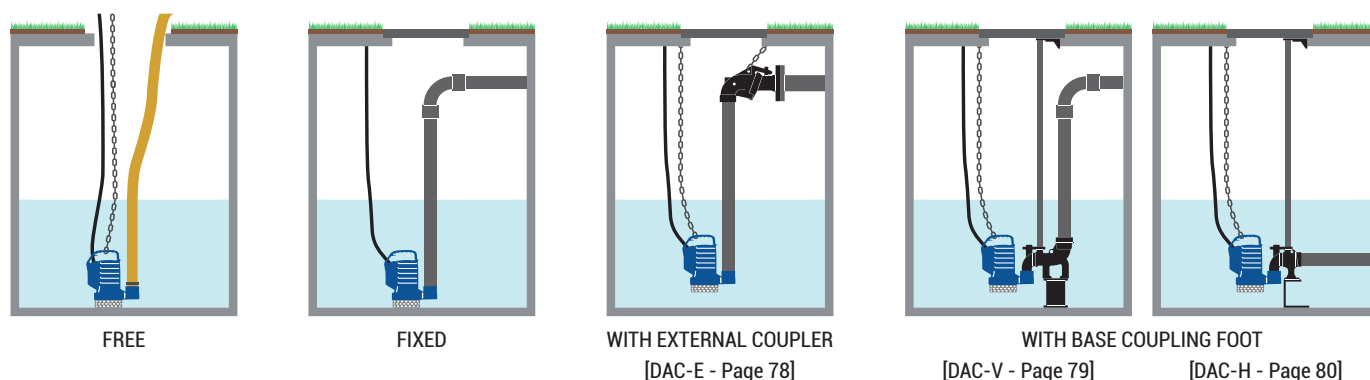





# bluePRO Series

The **bluePRO Series** is intended for use in applications requiring high performance or prolonged, heavy-duty operation in domestic and residential contexts.

Versions are available with four different hydraulics: DRENO (**DR bluePRO**), with multi-channel open impeller for clear or slightly soiled wastewaters; DRAGA (**DG bluePRO**), with vortex impeller and large free passage for wastewaters with heavy soil; GRINDER (**GR bluePRO**), with grinding system; and HIGH HEAD (**AP bluePRO**), with multi-channel open impeller and high head.

They are designed to provide optimal service with **blueBOX** lifting stations.

Models with vertical discharge have a breather allowing them to be primed without touching the

system even after the tank has been completely emptied.

All components are designed to deliver outstanding reliability and ensure quick, easy maintenance.


Every model undergoes pressurised testing to guarantee perfect assembly and operation of the gaskets, cable gland and mechanical seals.

The cast iron structure and double mechanical seal in oil chamber make these models rugged and reliable and suitable for even heavy-duty applications lifting strained or soiled wastewater containing solids or filaments, in domestic and residential installations or small civil plants.

Models available in ATEX/IECEx certified version

II 3G k Ex nA IIC T3 Gc  
II 3G k Ex nA nC IIC T3 Gc

## Operating ranges

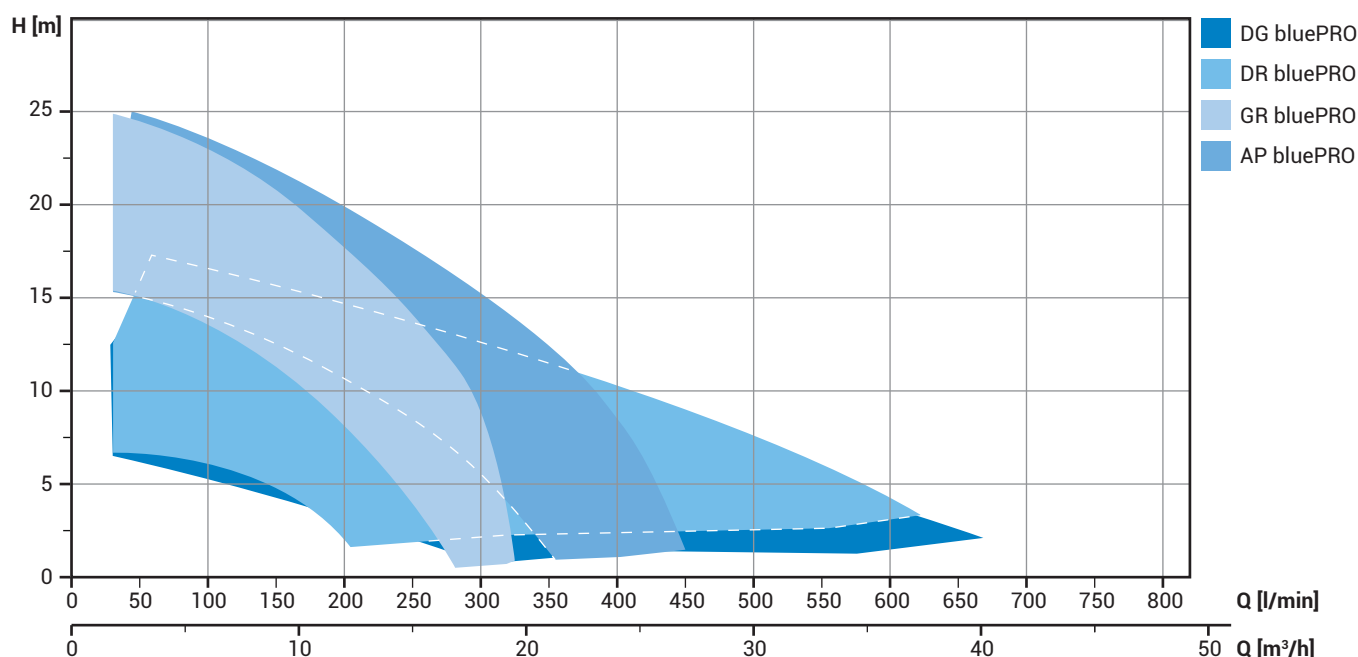

## Construction materials

Case	Cast iron EN-GJL-250
Impeller	Cast iron EN-GJL-250
Nuts and bolts	Stainless steel - Class A2-70
Standard gasket	Rubber - NBR
Shaft	Stainless steel - AISI 431
Paint type	Ecological bicomponent epoxy (medium thickness 80 µm)

## Operating specifications

Max operating temperature	40°C [90°C max 3 min]
pH of treated fluid	6 ÷ 14
Viscosity of treated fluid	1 mm²/s
Maximum immersion depth	20 m
Density of treated fluid	1 Kg/dm³
Maximum acoustic pressure	<70 dB
Max starts per hour	30

The data provided are not binding.  
Zenit reserves the right to modify the product without advance notification.



## DG *bluePRO*



### DG [DRAGA]

- Cast iron vortex impeller
  - Full free passage
- 
- Sewage
  - Soiled wastewaters with solids
  - Lifting stations in civil and residential plants

## Range characteristics

Power supply	220/240V ~1 - 380/400V ~3
Frequency	60 Hz
Power	0.37 ÷ 1.5 kW
Poles	2
Discharge vertical	G 1½" - G 2"
horizontal	-
Free passage	max 50 mm
Max flow rate	668 l/min
Max head	15.3 m



## DR *bluePRO*



### DR [DRENO]

- Cast iron multi-channel open impeller
  - Suction strainer
- 
- Clear or slightly soiled wastewaters
  - Strained, seepage and underground pump-out waters
  - Irrigation and installations requiring high hydraulic performances

Power supply	220/240V ~1 - 380/400V ~3
Frequency	60 Hz
Power	0.37 ÷ 1.5 kW
Poles	2
Discharge vertical	G 1½" - G 2"
horizontal	-
Free passage	max 15 mm
Max flow rate	627 l/min
Max head	17.3 m



## GR *bluePRO*



### GR [GRINDER]

- Cast iron multi-channel open impeller
  - Grinding system with three-blade rotary knife
- 
- Soiled waters containing fibres and filaments
  - Unstrained civil wastewaters
  - Lifting stations in civil and residential plants

Power supply	220/240V ~1 - 380/400V ~3
Frequency	60 Hz
Power	0.74 ÷ 1.5 kW
Poles	2
Discharge vertical	-
horizontal	G 1½" - DN32
Free passage	-
Max flow rate	326 l/min
Max head	25.0 m



## AP *bluePRO*



### AP [Alta Prevalenza]

- Cast iron multi-channel open impeller
  - High manometric head
- 
- Mainly clean liquids, or liquids with small solids or sand
  - Slightly sandy seepage waters
  - Ideal for construction of fountains and water features

Power supply	220/240V ~1 - 380/400V ~3
Frequency	60 Hz
Power	0.74 ÷ 1.5 kW
Poles	2
Discharge vertical	-
horizontal	G 1½" - DN32
Free passage	max 6 mm
Max flow rate	450 l/min
Max head	25,9 m



# bluePRO Series [GRINDER]

**GR bluePRO** models incorporate a grinding system comprising a revolving three-bladed knife rigidly mounted on the drive shaft and a steel plate with holes with sharp edges.

This system, capable of speeds of up to 69,000 cuts per minute, finely chops filaments and expels them along the discharge pipeline with no risk of impeller jamming, also keeping the pipeline clean.

Cast iron construction guarantees low vibration and excellent reliability.

In single-phase version, the pump comes in an outer

case containing a circuit breaker to ensure a high startup torque and effective cutting even during restarts.

It also contains an overload protection device which not only provides integral thermal protection for the stator but also offers additional safeguards for the motor when handling heavily soiled liquids.

## Applications

Used for the lifting and transfer of heavily soiled wastewaters, sewage and civil and industrial wastewaters, even on narrow pipelines.

Suitable for pumping liquids containing even long filaments and fibres and large-sized destructible solid bodies.

Suitable for applications requiring high pressure levels.




### CHOPPER KNIFE [GR bluePRO]

Rugged three-bladed chromium steel chopper knife specially treated for added hardness and reliability when cutting solid bodies.

### ANTI-CLOGGING SYSTEM [GR bluePRO]

The special design of the hydraulic part aids the expulsion of suspended solids and prevents fouling of the impeller.



# bluePRO Series



## HANDLE

Ergonomic handle styled for optimal grip. Shaped to take a shackle to hold the pump steady during handling.

## ADJUSTABLE FLOAT SWITCH

Float switch stroke adjustment system for modification of start-stop levels.




## CABLE GLAND

Innovative cable gland system with cable holder system and twin O-rings to ensure maximum tightness. Simpler extraction for maintenance.


## CAPACITOR

Single-phase models have internal capacitor.



## CASE


EN-GJL-250 cast iron construction guarantees solidity and durability even in case of maintenance requiring removal and replacement of the motor.



## STRAINER [DR bluePRO]



Stainless steel suction strainer and diffuser plate (models 50, 75 and 100). Techno-polymer suction strainer with cast iron diffuser plate and foot (models 150 and 200).

## Highlight

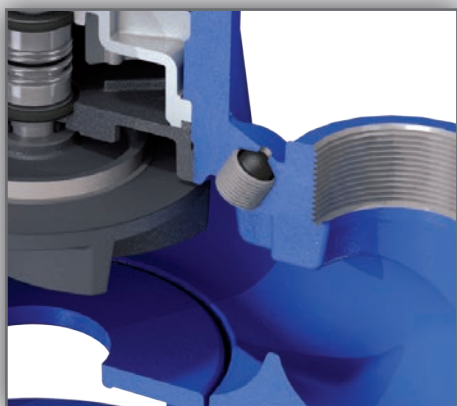


## BREATHER [DG bluePRO] [DR bluePRO]

Breather for venting the air accumulated inside the pump after the pit empties, ensuring reliable pump priming even after long periods out of use.



# bluePRO Series



## PRESSURISED TESTING

Stud bolt for closing the motor compartment for the pressurised testing every model undergoes.

## DATAPLATE

Laser-engraved stainless steel dataplate, perfectly legible even after long periods underwater. Slotted in place for easy removal.



## MECHANICAL SEALS

Two silicon carbide (2SiC) mechanical seals in oil chamber.





## V-RING

The V-Ring in direct contact with the liquid protects the mechanical seals from foreign bodies to keep them in good working condition.

## OIL CHAMBER

Guarantees longer mechanical seal lifetime and is easily accessible thanks to a patented system to simplify maintenance procedures.




## FREE PASSAGE [DG bluePRO]

Full free passage allowing the expulsion of solids up to 50 mm and preventing fouling of the impeller.

## ANTI-CLOGGING SYSTEM [DR bluePRO]

Stainless steel diffuser plate. Ensures the expulsion of small suspended solids and prevents fouling of the impeller.






# DG *bluePRO*

Models with vertical threaded discharge [GAS 1½"] - 2 poles

## Performances

	l/s	0	1	2	3	4	5	6
	l/min	0	60	120	180	240	300	360
	m³/h	0	3.6	7.2	10.8	14.4	18.0	21.6
① DG bluePRO 50/2/G40V A1BM[T]6		7.4	6.3	5.1	3.8	2.3	0.8	
② DG bluePRO 75/2/G40V A1BM[T]6		10.7	9.5	8.0	6.3	4.6	2.8	
③ DG bluePRO 100/2/G40V A1BM[T]6		13.0	11.8	10.4	8.7	6.9	5.1	3.2

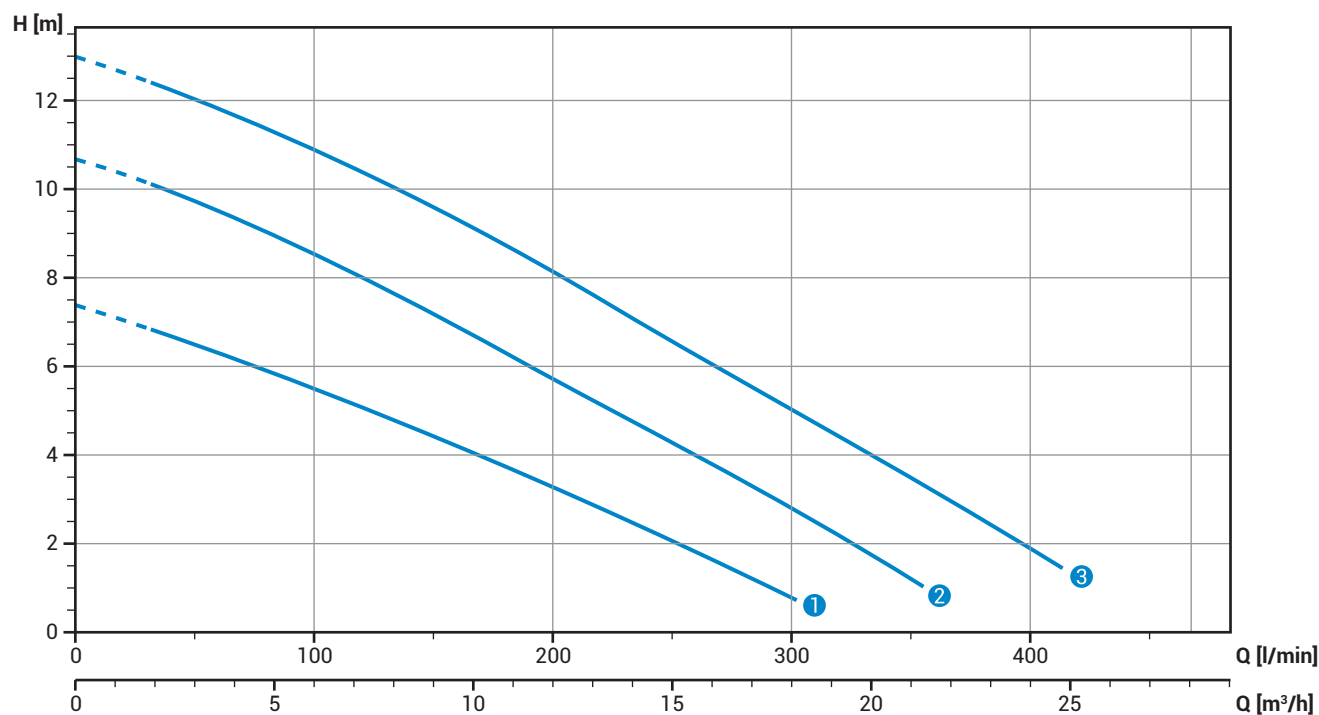

## Technical data


	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Ø	Free passage
① DG bluePRO 50/2/G40V A1BM6	230	1	-	0.37	3.1	3480	G 1½"	40 mm
② DG bluePRO 75/2/G40V A1BM6	230	1	-	0.55	4.2	3480	G 1½"	40 mm
③ DG bluePRO 100/2/G40V A1BM6	230	1	-	0.74	5.6	3480	G 1½"	40 mm
① DG bluePRO 50/2/G40V A1BT6	400	3	-	0.37	1.2	3480	G 1½"	40 mm
② DG bluePRO 75/2/G40V A1BT6	400	3	-	0.55	1.7	3480	G 1½"	40 mm
③ DG bluePRO 100/2/G40V A1BT6	400	3	-	0.74	2.2	3480	G 1½"	40 mm

# DG *bluePRO*

Models with vertical threaded discharge [GAS 2"] - 2 poles

## Performances

	l/s	0	2	4	6	8	10	12
	l/min	0	120	240	360	480	600	720
	m³/h	0	7.2	14.4	21.6	28.8	36.0	43.2
① DG bluePRO 150/2/G50V A1CM[T]6		12.9	11.0	8.7	6.2	3.5		
② DG bluePRO 200/2/G50V A1CM[T]6		16.2	14.4	12.0	9.2	6.5	3.8	

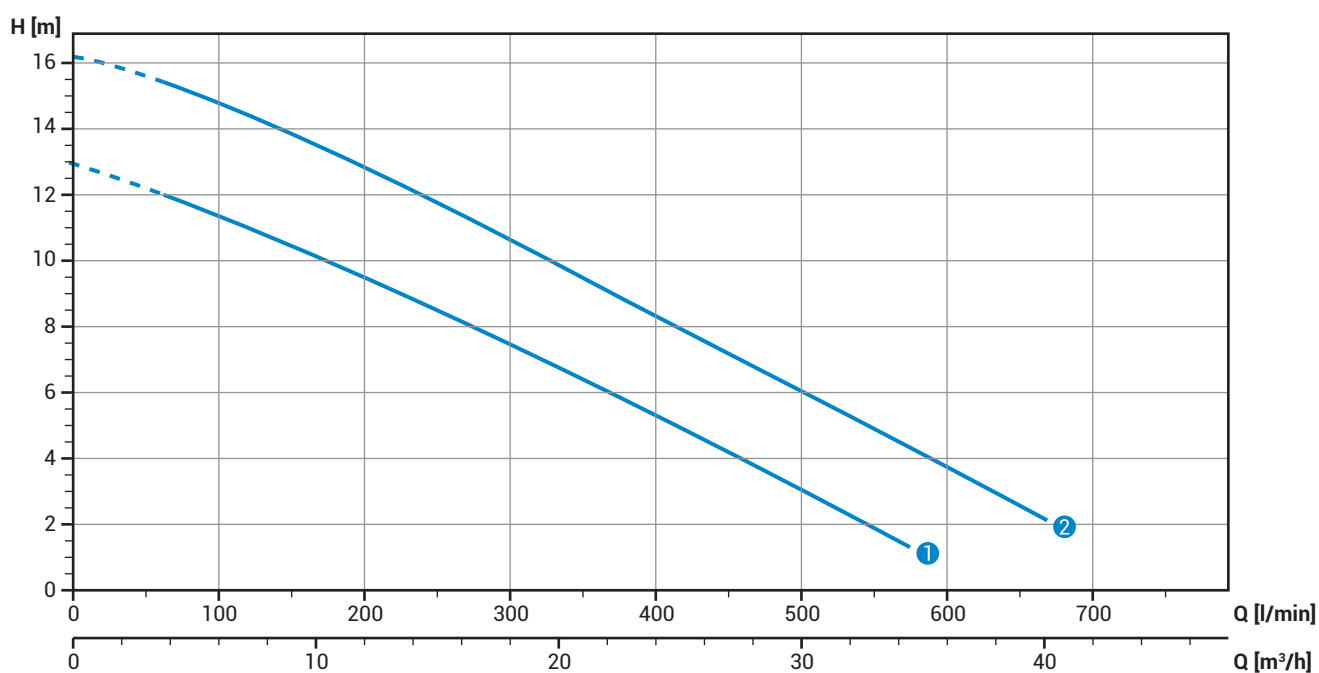



## Technical data

	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Ø	Free passage
① DG bluePRO 150/2/G50V A1CM6	230	1	-	1.1	7.5	3480	G 2"	50 mm
② DG bluePRO 200/2/G50V A1CM6	230	1	-	1.5	10.0	3480	G 2"	50 mm
① DG bluePRO 150/2/G50V A1CT6	400	3	-	1.1	3.2	3480	G 2"	50 mm
② DG bluePRO 200/2/G50V A1CT6	400	3	-	1.5	4.3	3480	G 2"	50 mm

# DG bluePRO

## Dimensions

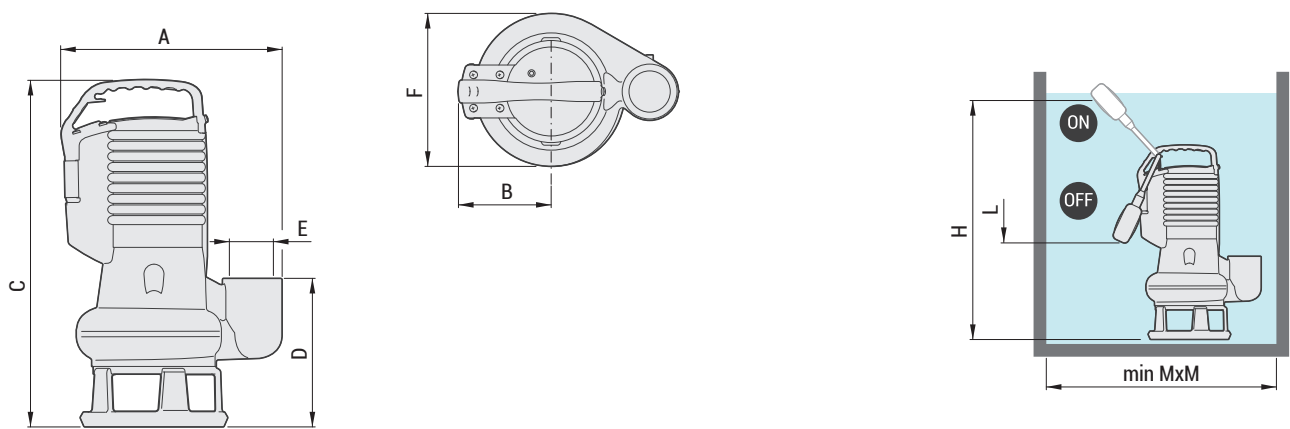

	Overall dimensions (mm)													Pieces per pallet 1000x1200 mm
	A	B	C	D	E	F	H	L	M	kg	X	Y	Z	
DG bluePRO 50/2/G40V A1BM[T]6	265	115	335	140	GAS 1½"	190	420	210	300	13	200	240	400	75 (25x3) 50 (25x2)
DG bluePRO 75/2/G40V A1BM[T]6	265	115	365	140	GAS 1½"	190	450	240	300	15	200	240	400	75 (25x3) 50 (25x2)
DG bluePRO 100/2/G40V A1BM[T]6	265	115	365	140	GAS 1½"	190	450	240	300	15.5	200	240	400	75 (25x3) 50 (25x2)
DG bluePRO 150/2/G50V A1CM[T]6	295	125	465	195	GAS 2"	200	525	335	400	23	250	300	480	32 (16x2)
DG bluePRO 200/2/G50V A1CM[T]6	295	125	465	195	GAS 2"	200	525	335	400	24	250	300	480	32 (16x2)

M - Minimum dimensions. Suggested dimensions 500mm x 500mm

## Versions

### Single-phase models

- TC Thermal protection, capacitor
- TCG Thermal protection, capacitor, float switch

### Three-phase models


- NAE No electric accessory
- TRG Thermal protection, relay for motor protection, float switch

## Packaging



The rugged cardboard box packaging fulfils two functions: it protects the product in transit, thanks to the thickness of the board used and expanded polyurethane padding, and also provides key information about the pump's use and performance data, printed clearly and legibly in colour. Pumps are supplied complete with all the documentation required by European standards and a copy of the duty dataplate on a silvered decal that can be affixed to the manual to ensure the availability of all the most useful data (serial number, power rating, etc.) at all times.

## Installations

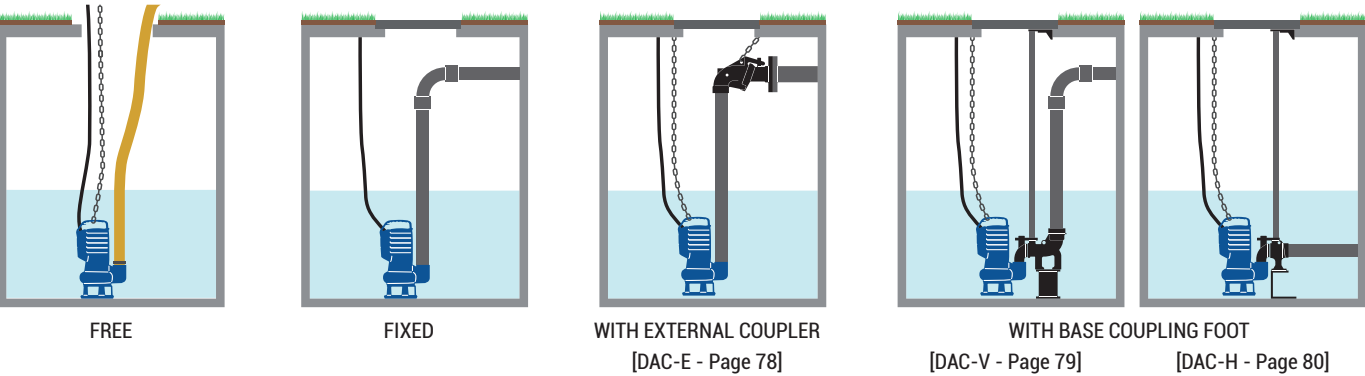




# DR *bluePRO*

Models with vertical threaded discharge [GAS 1 ¼"] - 2 poles

## Performances

	l/s	0	1	2	3	4	5
	l/min	0	60	120	180	240	300
	m³/h	0	3.6	7.2	10.8	14.4	18.0
① DR bluePRO 50/2/G32V A1BM[T]6		7.1	6.5	5.7	3.3		
② DR bluePRO 75/2/G32V A1BM[T]6		10.0	9.3	8.2	6.7	3.6	
③ DR bluePRO 100/2/G32V A1BM[T]6		12.8	12.1	11.1	9.8	7.8	4.2

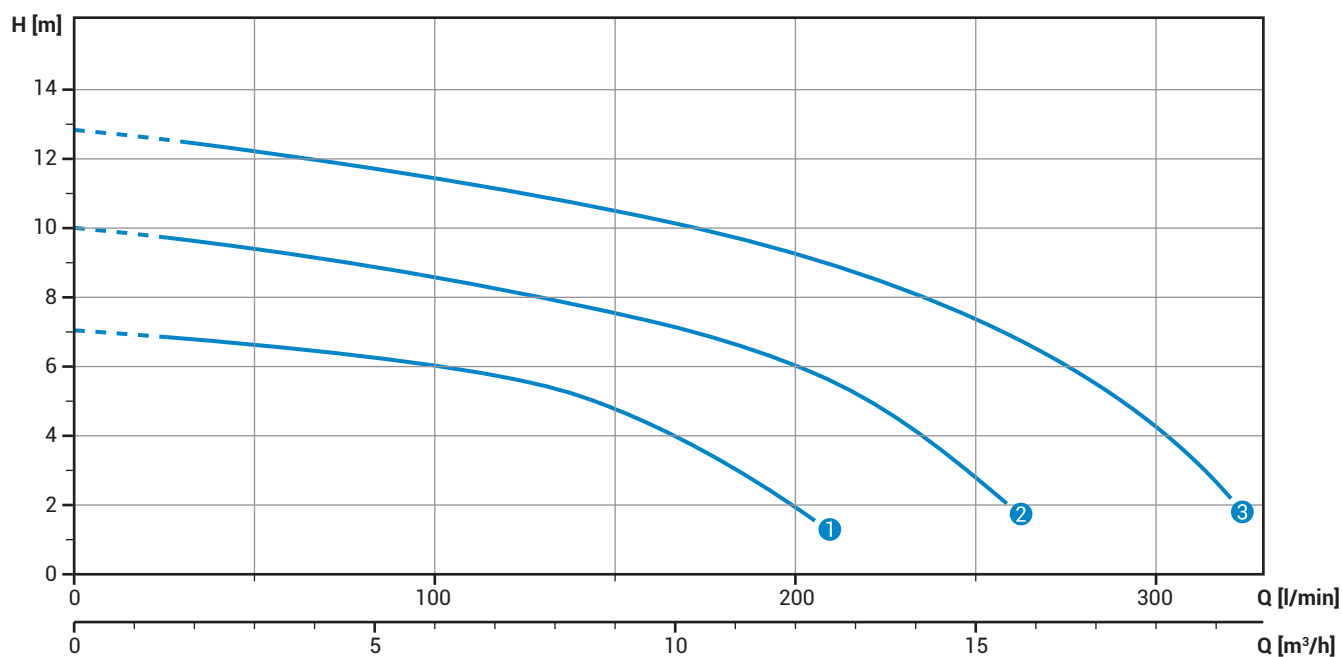

## Technical data


	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Ø	Free passage
① DR bluePRO 50/2/G32V A1BM6	230	1	-	0.37	3.1	3480	G 1 ¼"	15 mm
② DR bluePRO 75/2/G32V A1BM6	230	1	-	0.55	4.2	3480	G 1 ¼"	15 mm
③ DR bluePRO 100/2/G32V A1BM6	230	1	-	0.74	5.6	3480	G 1 ¼"	15 mm
① DR bluePRO 50/2/G32V A1BT6	400	3	-	0.37	1.2	3480	G 1 ¼"	15 mm
② DR bluePRO 75/2/G32V A1BT6	400	3	-	0.55	1.7	3480	G 1 ¼"	15 mm
③ DR bluePRO 100/2/G32V A1BT6	400	3	-	0.74	2.2	3480	G 1 ¼"	15 mm

# DR *bluePRO*

Models with vertical threaded discharge [GAS 2"] - 2 poles

## Performances

	l/s	0	2	4	6	8	10
	l/min	0	120	240	360	480	600
	m³/h	0	7.2	14.4	21.6	28.8	36.0
① DR bluePRO 150/2/G50V A1CM[T]6		14.3	12.7	10.8	8.3	5.2	
② DR bluePRO 200/2/G50V A1CM[T]6		18.2	16.2	13.9	11.3	8.2	4.3

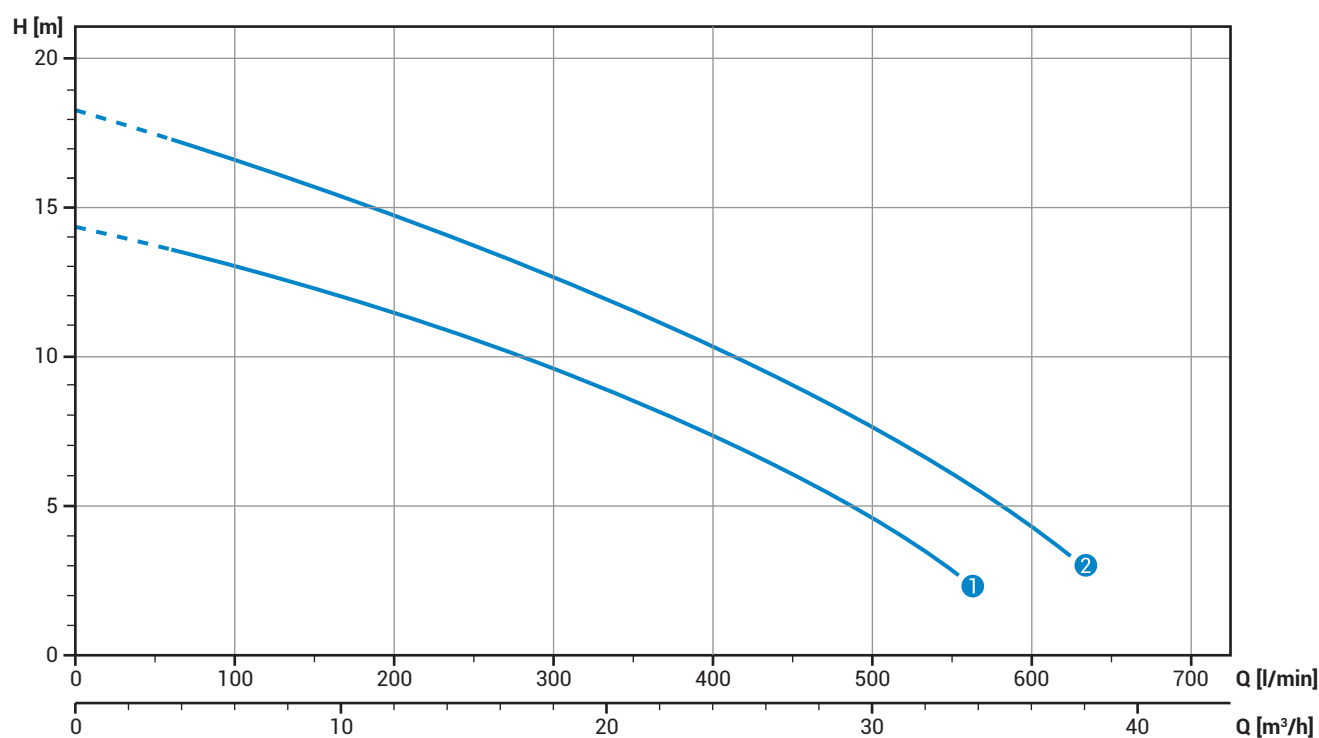


## Technical data

	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Ø	Free passage
① DR bluePRO 150/2/G50V A1CM6	230	1	-	1.1	7.5	3480	G 2"	10x30 mm
② DR bluePRO 200/2/G50V A1CM6	230	1	-	1.5	10.0	3480	G 2"	10x30 mm
① DR bluePRO 150/2/G50V A1CT6	400	3	-	1.1	3.2	3480	G 2"	10x30 mm
② DR bluePRO 200/2/G50V A1CT6	400	3	-	1.5	4.3	3480	G 2"	10x30 mm

# DR *bluePRO*

## Dimensions

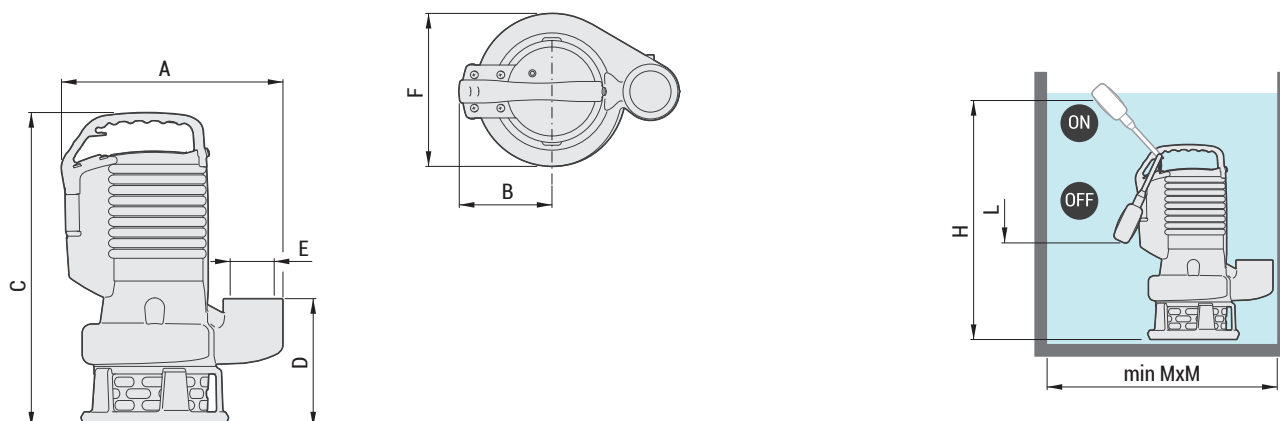

	Overall dimensions (mm)										X Y Z			Pieces per pallet	
	A	B	C	D	E	F	H	L	M	kg	X	Y	Z	1000x1200 mm	
DR bluePRO 50/2/G32V A1BM[T]6	255	115	290	110	GAS 1 1/4"	150	380	170	300	12	200	240	350	75 (25x3)	50 (25x2)
DR bluePRO 75/2/G32V A1BM[T]6	255	115	320	110	GAS 1 1/4"	150	410	200	300	13.5	200	240	350	75 (25x3)	50 (25x2)
DR bluePRO 100/2/G32V A1BM[T]6	255	115	320	110	GAS 1 1/4"	150	410	200	300	14	200	240	350	75 (25x3)	50 (25x2)
DR bluePRO 150/2/G50V A1CM[T]6	295	125	420	170	GAS 2"	200	480	290	400	23	250	300	480	32 (16x2)	
DR bluePRO 200/2/G50V A1CM[T]6	295	125	420	170	GAS 2"	200	480	290	400	24	250	300	480	32 (16x2)	

M - Minimum dimensions. Suggested dimensions 500mm x 500mm

## Versions

### Single-phase models

- TC Thermal protection, capacitor
- TCG Thermal protection, capacitor, float switch

### Three-phase models


- NAE No electric accessory
- TRG Thermal protection, relay for motor protection, float switch

## Packaging



The rugged cardboard box packaging fulfils two functions: it protects the product in transit, thanks to the thickness of the board used and expanded polyurethane padding, and also provides key information about the pump's use and performance data, printed clearly and legibly in colour. Pumps are supplied complete with all the documentation required by European standards and a copy of the duty dataplate on a silvered decal that can be affixed to the manual to ensure the availability of all the most useful data (serial number, power rating, etc.) at all times.

## Installations

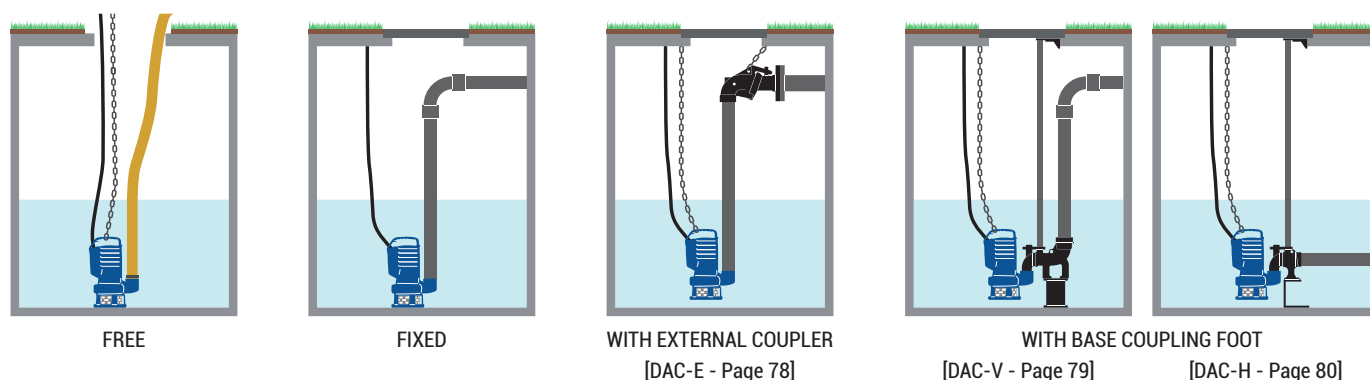




# GR *bluePRO*

Models with horizontal flanged and threaded discharge [GAS 1½" - DN32 PN6] - 2 poles

## Performances

	l/s	0	1	2	3	4	5
	l/min	0	60	120	180	240	300
	m³/h	0	3.6	7.2	10.8	14.4	18.0
① GR bluePRO 100/2/G40H A1CM[T]6		15.7	14.8	12.7	9.5	4.9	
② GR bluePRO 150/2/G40H A1CM[T]6		19.0	18.0	16.0	12.9	8.6	2.9
③ GR bluePRO 200/2/G40H A1CM[T]6		25.5	24.3	22.3	19.0	14.8	9.0

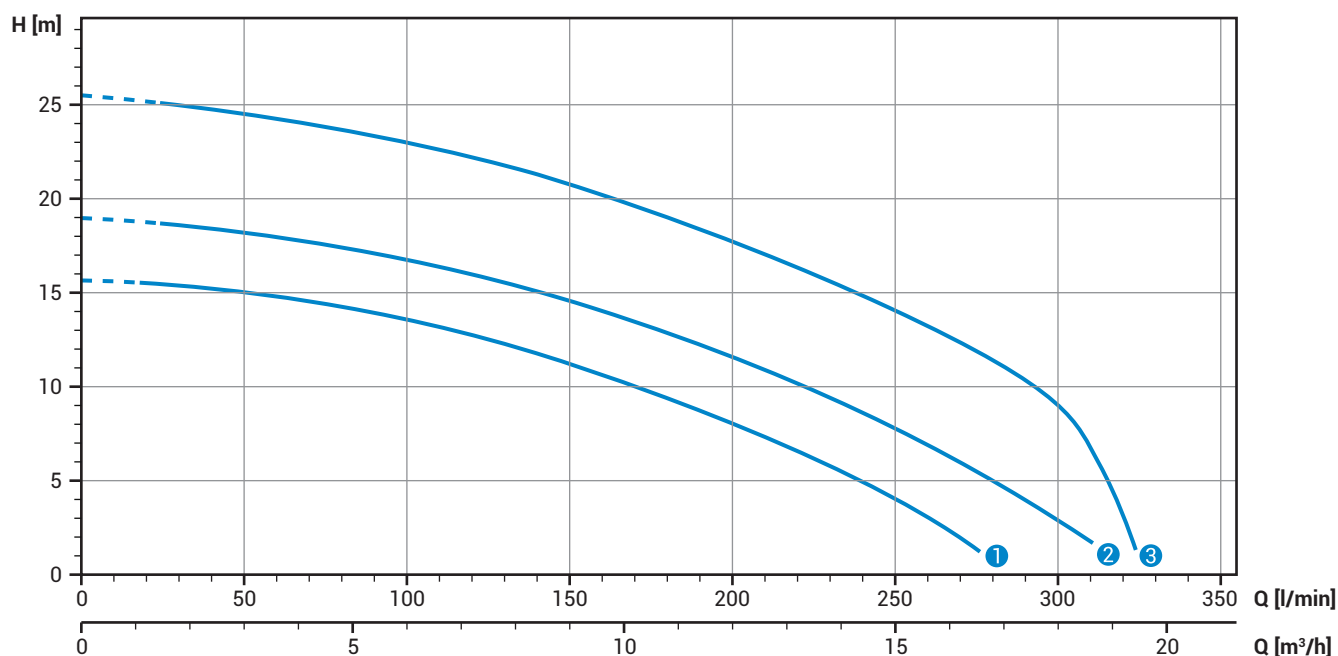


## Technical data

	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Start	Ø	Free passage
① GR bluePRO 100/2/G40H A1CM6	230	1	-	0.74	5.5	3480	Dir	G 1½" - DN32 PN6	-
② GR bluePRO 150/2/G40H A1CM6	230	1	-	1.10	7.5	3480	Dir	G 1½" - DN32 PN6	-
③ GR bluePRO 200/2/G40H A1CM6	230	1	-	1.50	10.0	3480	Dir	G 1½" - DN32 PN6	-
① GR bluePRO 100/2/G40H A1CT6	400	3	-	0.74	2.7	3480	Dir	G 1½" - DN32 PN6	-
② GR bluePRO 150/2/G40H A1CT6	400	3	-	1.10	3.2	3480	Dir	G 1½" - DN32 PN6	-
③ GR bluePRO 200/2/G40H A1CT6	400	3	-	1.50	4.3	3480	Dir	G 1½" - DN32 PN6	-

# GR *bluePRO*

## Dimensions

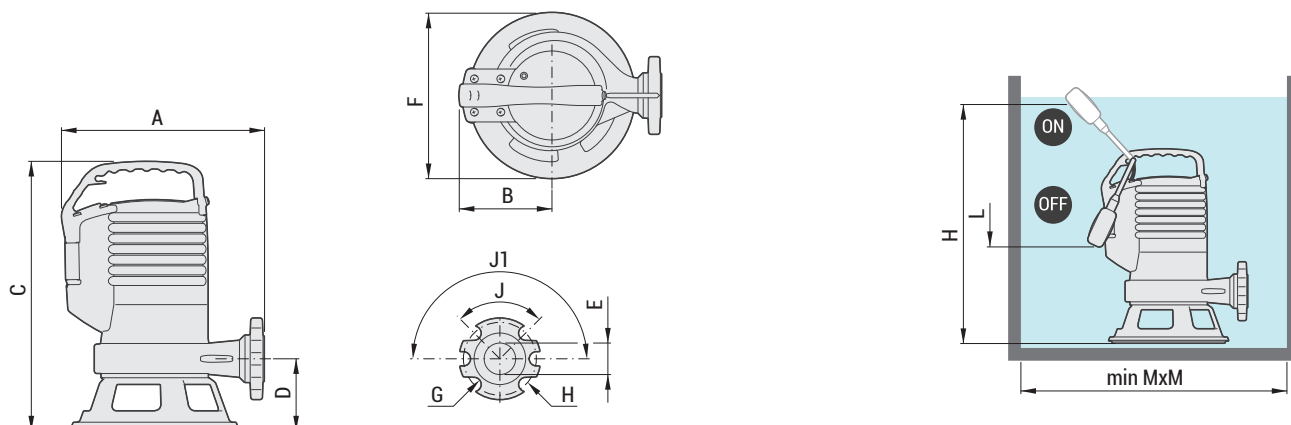

Overall dimensions (mm)

	A	B	C	D	E	F	G	H	J	J1	H	L	M	kg	X	Y	Z	Pieces per pallet 1000x1200 mm
GR bluePRO 100/2/G40H A1CM[T]6	270	130	365	95	GAS 1½"	220	14	90	90°	180°	450	240	450	19	250	300	400	48 (16x3) 32 (16x2)
GR bluePRO 150/2/G40H A1CM[T]6	285	125	410	100	GAS 1½"	230	14	90	90°	180°	495	285	450	24	250	300	440	32 (16x2)
GR bluePRO 200/2/G40H A1CM[T]6	285	125	410	100	GAS 1½"	230	14	90	90°	180°	495	285	450	26	250	300	440	32 (16x2)

M - Minimum dimensions. Suggested dimensions 500mm x 500mm

## Versions

### Single-phase models

TCDT Thermal protection, capacitor, startup capacitor, overload protection

TCDGT Thermal protection, capacitor, startup capacitor, overload protection, float switch

### Three-phase models

TR Thermal protection, relay for motor protection


TRG Thermal protection, relay for motor protection, float switch

## Packaging




The rugged cardboard box packaging fulfils two functions: it protects the product in transit, thanks to the thickness of the board used and expanded polyurethane padding, and also provides key information about the pump's use and performance data, printed clearly and legibly in colour. Pumps are supplied complete with all the documentation required by European standards and a copy of the duty dataplate on a silvered decal that can be affixed to the manual to ensure the availability of all the most useful data (serial number, power rating, etc.) at all times.


## Installations




FREE




FIXED



WITH EXTERNAL COUPLER  
[DAC-E - Page 78]



WITH BASE COUPLING FOOT  
[DAC-V - Page 79]




[DAC-H - Page 80]

# AP bluePRO

Models with horizontal flanged and threaded discharge [GAS 1½" - DN32 PN6] - 2 poles

## Performances

	l/s	0	1	2	3	4	5	6	7
	l/min	0	60	120	180	240	300	360	420
	m³/h	0	3.6	7.2	10.8	14.4	18.0	21.6	25.2
① AP bluePRO 100/2/G40H A1CM[T]6		15.5	14.9	13.4	11.5	9.0	5.5		
② AP bluePRO 150/2/G40H A1CM[T]6		19.0	18.4	17.0	15.0	12.4	9.4	5.6	
③ AP bluePRO 200/2/G40H A1CM[T]6		25.7	24.6	23.0	20.7	18.2	15.3	11.8	6.3

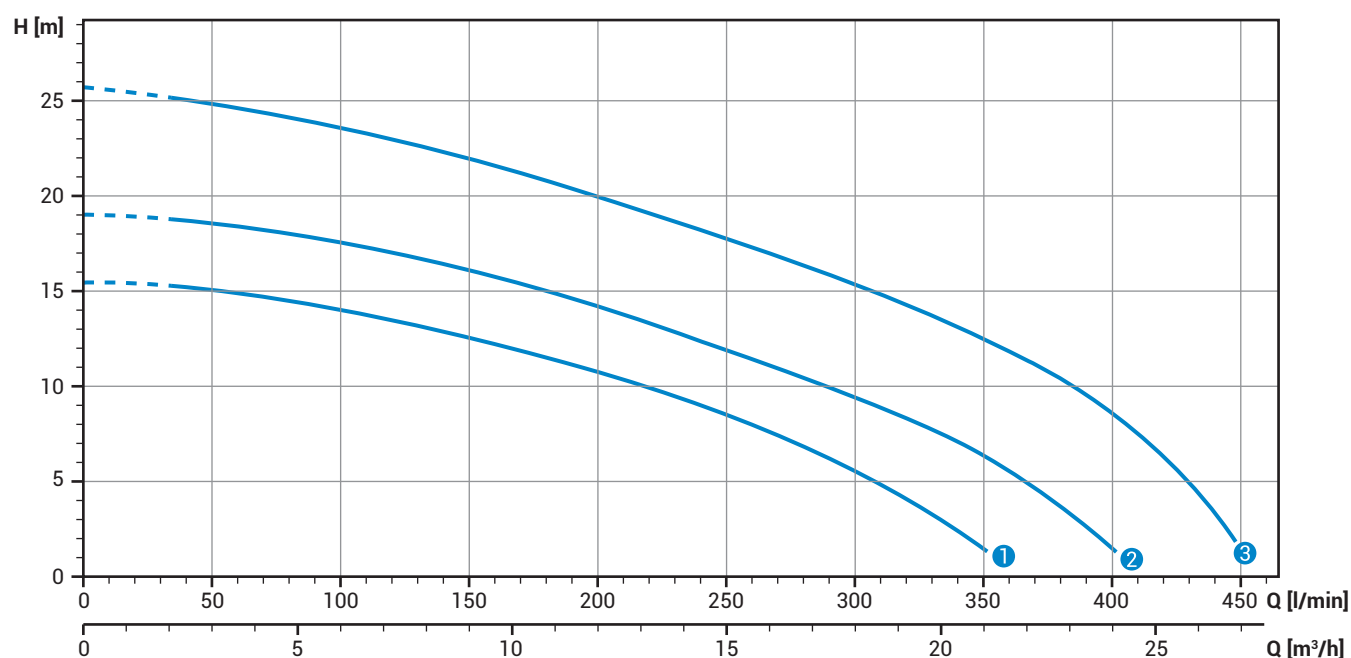


## Technical data

	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Start	Ø	Free passage
① AP bluePRO 100/2/G40H A1CM6	230	1	-	0.74	5.5	3480	Dir	G 1½" - DN32 PN6	6 mm
② AP bluePRO 150/2/G40H A1CM6	230	1	-	1.10	7.5	3480	Dir	G 1½" - DN32 PN6	6 mm
③ AP bluePRO 200/2/G40H A1CM6	230	1	-	1.50	10.0	3480	Dir	G 1½" - DN32 PN6	6 mm
① AP bluePRO 100/2/G40H A1CT6	400	3	-	0.74	2.7	3480	Dir	G 1½" - DN32 PN6	6 mm
② AP bluePRO 150/2/G40H A1CT6	400	3	-	1.10	3.2	3480	Dir	G 1½" - DN32 PN6	6 mm
③ AP bluePRO 200/2/G40H A1CT6	400	3	-	1.50	4.1	3480	Dir	G 1½" - DN32 PN6	6 mm



# AP bluePRO

## Dimensions

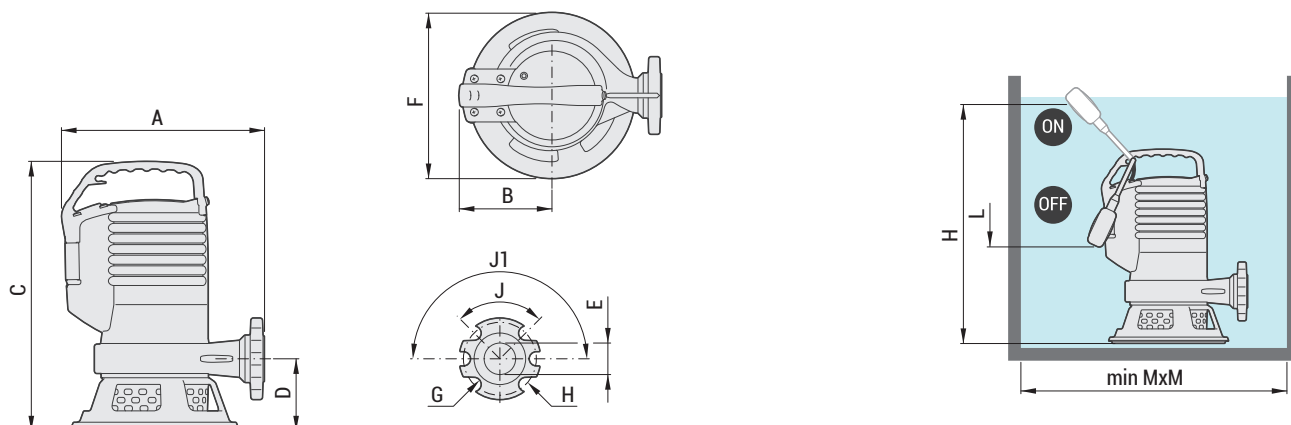

Overall dimensions (mm)

	A	B	C	D	E	F	G	H	J	J1	H	L	M	kg	X	Y	Z	Pieces per pallet 1000x1200 mm
AP bluePRO 100/2/G40H A1CM[T]6	270	130	365	95	GAS 1½"	220	14	90	90°	180°	450	240	450	19	250	300	400	48 (16x3) 32 (16x2)
AP bluePRO 150/2/G40H A1CM[T]6	285	125	410	100	GAS 1½"	230	14	90	90°	180°	495	285	450	24	250	300	440	32 (16x2)
AP bluePRO 200/2/G40H A1CM[T]6	285	125	410	100	GAS 1½"	230	14	90	90°	180°	495	285	450	26	250	300	440	32 (16x2)

M - Minimum dimensions. Suggested dimensions 500mm x 500mm

## Versions

### Single-phase models

- TC Thermal protection, capacitor
- TCG Thermal protection, capacitor, float switch

### Three-phase models


- NAE No electric accessory
- TRG Thermal protection, relay for motor protection, float switch

## Packaging



The rugged cardboard box packaging fulfils two functions: it protects the product in transit, thanks to the thickness of the board used and expanded polyurethane padding, and also provides key information about the pump's use and performance data, printed clearly and legibly in colour. Pumps are supplied complete with all the documentation required by European standards and a copy of the duty dataplate on a silvered decal that can be affixed to the manual to ensure the availability of all the most useful data (serial number, power rating, etc.) at all times.

## Installations

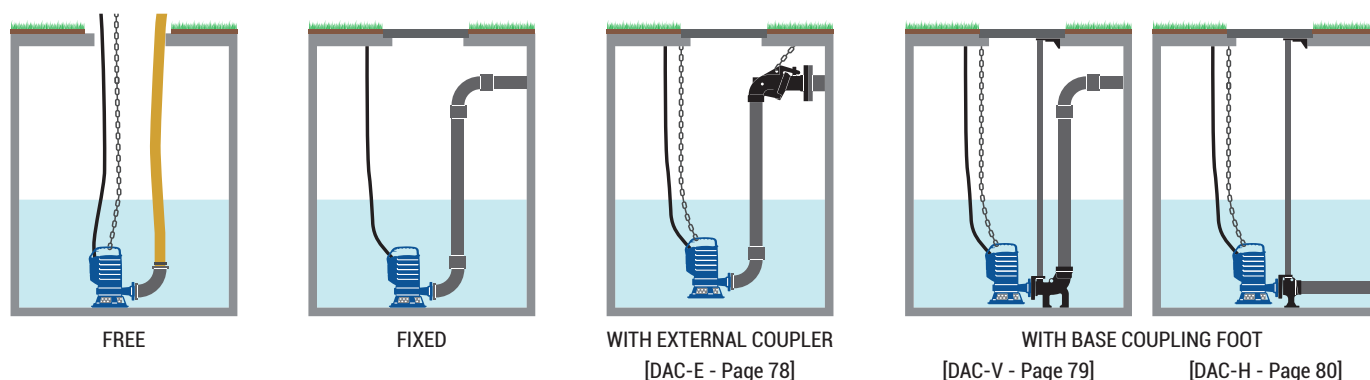





# E Series

Lightweight, reliable cast iron submersible pumps. Versions are available with two different hydraulics: DRENO (**DRE**), with multi-channel open impeller for clear or slightly soiled wastewaters; and DRAGA (**DGE**), with vortex impeller and large free passage for wastewaters with heavy soil.


The compact size and horizontal and vertical discharge allow any installation, even in existing plants or small pits.

Every model undergoes pressurised testing to guarantee perfect assembly and operation of the gaskets, cable gland and mechanical seals.

**E Series** models are suitable mainly for permanent installations yet, thanks to their convenience and ease of handling, they can also be used in emergencies for pumping-out flooding premises or for temporary installations for pumping from wells and tanks.

Intended mainly for domestic use, these pumps are recommended for pressurising small plants, for garden sprinkler systems, for supplying fountains, for emptying swimming-pools or tanks and for pumping out flooded cellars or garages.

## Operating ranges

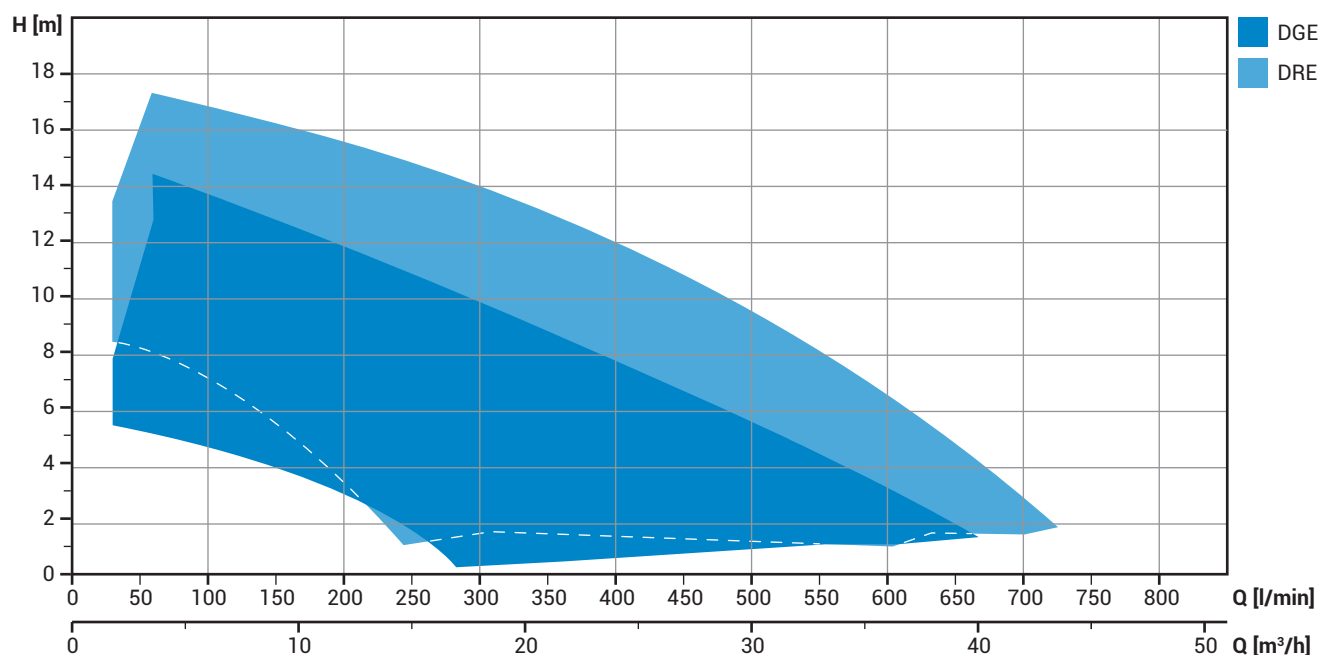

## Construction materials

Case	Cast iron EN-GJL-250
Impeller	Cast iron EN-GJL-250
Nuts and bolts	Stainless steel - Class A2-70
Standard gasket	Rubber - NBR
Shaft	Stainless steel - AISI 431
Paint type	Ecological bicomponent epoxy (medium thickness 80 µm)

## Operating specifications

Max operating temperature	40°C [90°C max 3 min]
pH of treated fluid	6 ÷ 14
Viscosity of treated fluid	1 mm²/s
Maximum immersion depth	20 m
Density of treated fluid	1 Kg/dm³
Maximum acoustic pressure	<70 dB
Max starts per hour	30

The data provided are not binding.  
Zenit reserves the right to modify the product without advance notification.





## DG [DRAGA]




- Cast iron vortex impeller
- Large free passage

- Sewage
- Soiled wastewaters with solids
- Lifting stations in civil and residential plants



## DR [DRENO]



- Cast iron multi-channel open impeller
- Stainless steel suction strainer

- Clear or slightly soiled wastewaters
- Strained, seepage and underground pump-out waters
- Garden sprinklers and pumping from tanks

## Range characteristics

<b>Power supply</b>	220/240V ~1 - 380/400V ~3	
<b>Frequency</b>	60 Hz	
<b>Power</b>	0.37 ÷ 1.5 kW	
<b>Poles</b>	2	
<b>Discharge</b>	<b>vertical</b>	G 2"
	<b>horizontal</b>	-
<b>Free passage</b>	max 50 mm	
<b>Max flow rate</b>	667 l/min	
<b>Max head</b>	14.4 m	

<b>Power supply</b>	220/240V ~1 - 380/400V ~3	
<b>Frequency</b>	60 Hz	
<b>Power</b>	0.3 ÷ 0.74 kW	
<b>Poles</b>	2	
<b>Discharge</b>	<b>vertical</b>	G 1 1/4" - G 2"
	<b>horizontal</b>	G 2" - DN50
<b>Free passage</b>	max 15 mm	
<b>Max flow rate</b>	745 l/min	
<b>Max head</b>	17.3 m	

# E Series




## HANDLE

Stainless steel lifting and carrying handle.



## CASE

Rugged cast iron construction.



## DISCHARGE PORT

Wide range of models with vertical or horizontal discharge, with threaded or flanged connections for absolutely flexible installation.

## FEET

The rugged feet integral in the cast iron case give the pump stability and keep it at the correct suction height with no additional accessories required.


## Highlight



## STRUCTURE

Pump body dismantles for easy maintenance of internal components.

# E Series

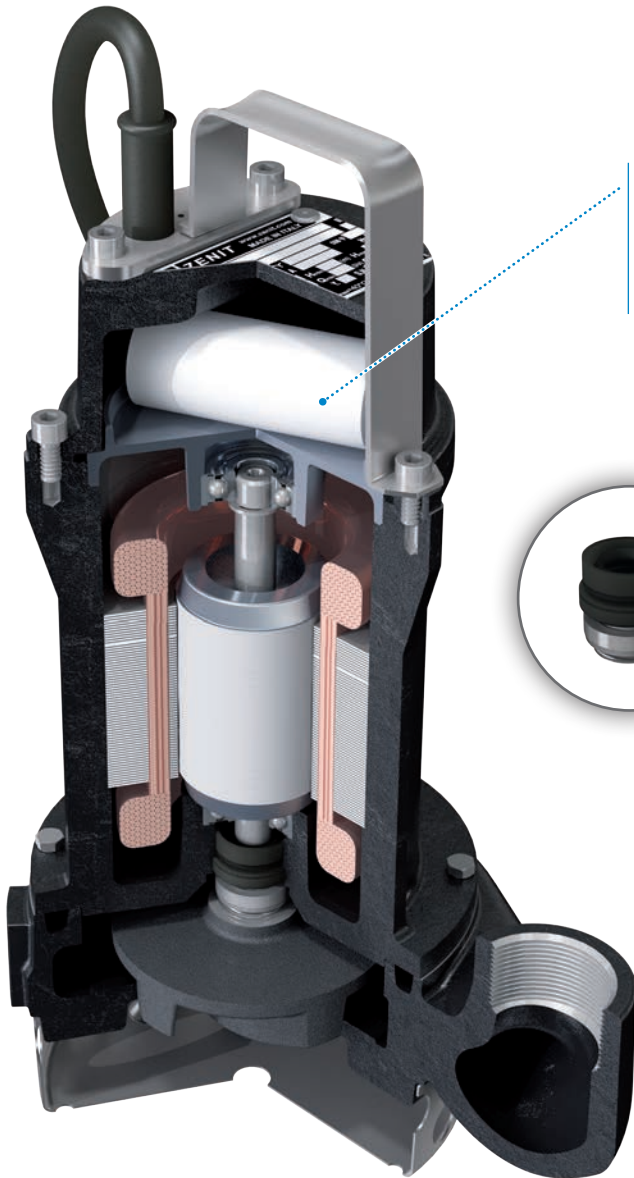

## CAPACITOR/RELAY

Single-phase models have internal capacitor. Three-phase models are equipped with thermal protection and relay to safeguard the motor (optional).

## MECHANICAL SEALS

One mechanical seal in silicon carbide (SiC) and one lip seal.



## STRAINER [DRE]

Stainless steel suction strainer.



## FREE PASSAGE [DGE]

Ample free passage allowing the expulsion of solids and preventing fouling of the impeller.



## ANTI-CLOGGING SYSTEM [DRE]


The specially shaped hydraulics ensure the expulsion of small suspended solids and prevent fouling of the impeller.



## Models with vertical threaded discharge [GAS 2"] - 2 poles

### Performances

	l/s	0	2	4	6	8	10
	l/min	0	120	240	360	480	600
	m³/h	0	7.2	14.4	21.6	28.8	36.0
① DGE 50/2/G50V B0BM[T]6		5.6	4.3	1.9			
② DGE 75/2/G50V B0BM[T]6		8.1	6.7	4.3	0.6		
③ DGE 100/2/G50V B0CM[T]6		11.3	9.6	7.5	5.3	2.8	
④ DGE 150/2/G50V B0CM[T]6		13.8	11.7	9.4	6.9	4.2	1.3
⑤ DGE 200/2/G50V B0CM[T]6		15.4	13.4	11.0	8.5	6.0	3.1

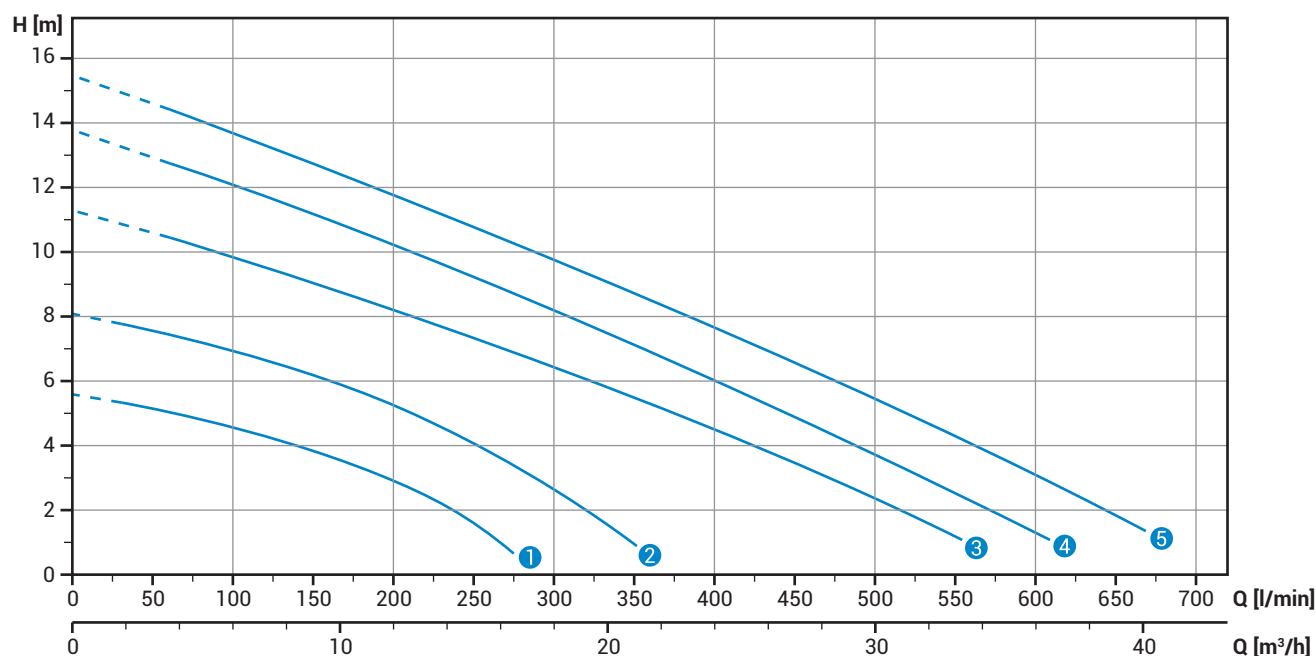


### Technical data

	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Ø	Free passage
① DGE 50/2/G50V B0BM6	230	1	-	0.37	2.8	3480	G 2"	40 mm
② DGE 75/2/G50V B0BM6	230	1	-	0.55	3.8	3480	G 2"	40 mm
③ DGE 100/2/G50V B0CM6	230	1	-	0.88	6.8	3480	G 2"	50 mm
④ DGE 150/2/G50V B0CM6	230	1	-	1.10	7.4	3480	G 2"	50 mm
⑤ DGE 200/2/G50V B0CM6	230	1	-	1.50	9.4	3480	G 2"	50 mm
① DGE 50/2/G50V B0BT6	400	3	-	0.37	1.2	3480	G 2"	40 mm
② DGE 75/2/G50V B0BT6	400	3	-	0.55	1.4	3480	G 2"	40 mm
③ DGE 100/2/G50V B0CT6	400	3	-	0.88	2.0	3480	G 2"	50 mm
④ DGE 150/2/G50V B0CT6	400	3	-	1.10	2.7	3480	G 2"	50 mm
⑤ DGE 200/2/G50V B0CT6	400	3	-	1.50	3.6	3480	G 2"	50 mm



## Dimensions

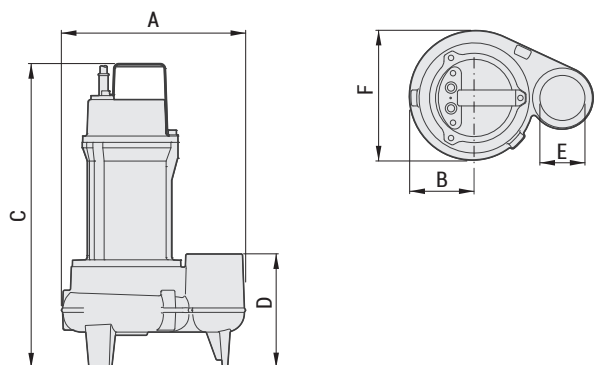

Overall dimensions (mm)

	A	B	C	D	E	F	kg	X	Y	Z
DGE 50/2/G50V B0BM[T]6	230	80	385	120	GAS 2"	165	12	225	385	245
DGE 75/2/G50V B0BM[T]6	230	80	385	120	GAS 2"	165	14	225	385	245
DGE 100/2/G50V B0CM[T]6	270	100	425	130	GAS 2"	205	19	285	475	235
DGE 150/2/G50V B0CM[T]6	270	100	425	130	GAS 2"	205	20	285	475	235
DGE 200/2/G50V B0CM[T]6	270	100	425	150	GAS 2"	205	21	285	475	235



## Versions


### Single-phase models

- TC Thermal protection, capacitor
- TCG Thermal protection, capacitor, float switch


### Three-phase models

- NAE No electric accessory
- TRG Thermal protection, relay for motor protection, float switch


## Installations



FREE



FIXED




WITH EXTERNAL COUPLER  
[DAC-E - Page 78]

## Models with vertical threaded discharge [GAS 1¼"] - 2 poles

### Performances

	l/s	0	1	2	3	4	5
	l/min	0	60	120	180	240	300
	m³/h	0	3.6	7.2	10.8	14.4	18.0
① DRE 50/2/G32V A0BM[T]6		8.5	8.0	6.6	4.4	1.6	
② DRE 75/2/G32V A0BM[T]6		13.7	13.1	11.9	10.0	7.1	2.9

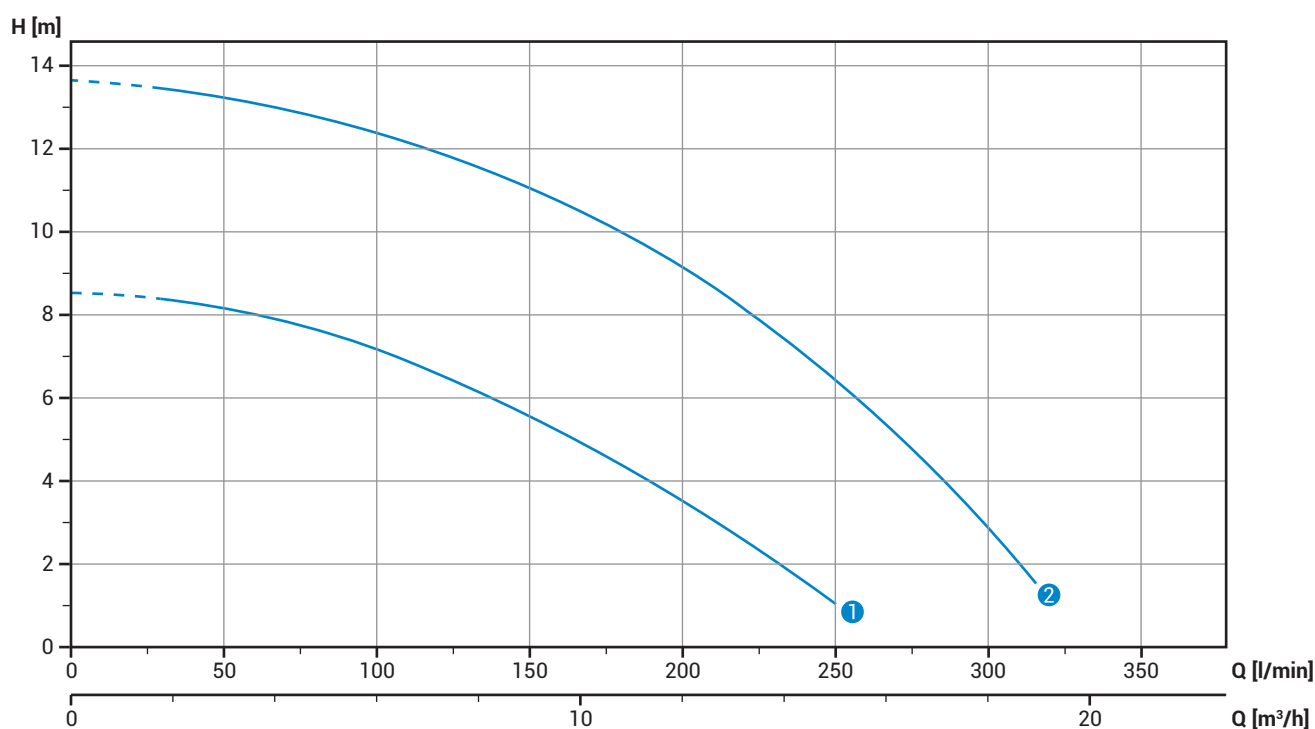


### Technical data

	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Ø	Free passage
① DRE 50/2/G32V A0BM6	230	1	-	0.37	2.8	3480	G 1¼"	15 mm
② DRE 75/2/G32V A0BM6	230	1	-	0.55	3.8	3480	G 1¼"	15 mm
① DRE 50/2/G32V A0BT6	400	3	-	0.37	1.1	3480	G 1¼"	15 mm
② DRE 75/2/G32V A0BT6	400	3	-	0.55	1.4	3480	G 1¼"	15 mm

## Models with vertical threaded discharge [GAS 2"] - 2 poles

### Performances

	l/s	0	2	4	6	8	10	12
	l/min	0	120	240	360	480	600	720
	m³/h	0	7.2	14.4	21.6	28.8	36.0	43.2
① DRE 100/2/G50V A0CM[T]6		12.8	12.1	10.8	8.6	5.7	1.9	
② DRE 150/2/G50V A0CM[T]6		14.2	13.5	12.0	9.8	6.8	3.2	
③ DRE 200/2/G50V A0CM[T]6		17.9	16.7	15.1	13.0	10.4	6.9	2.7

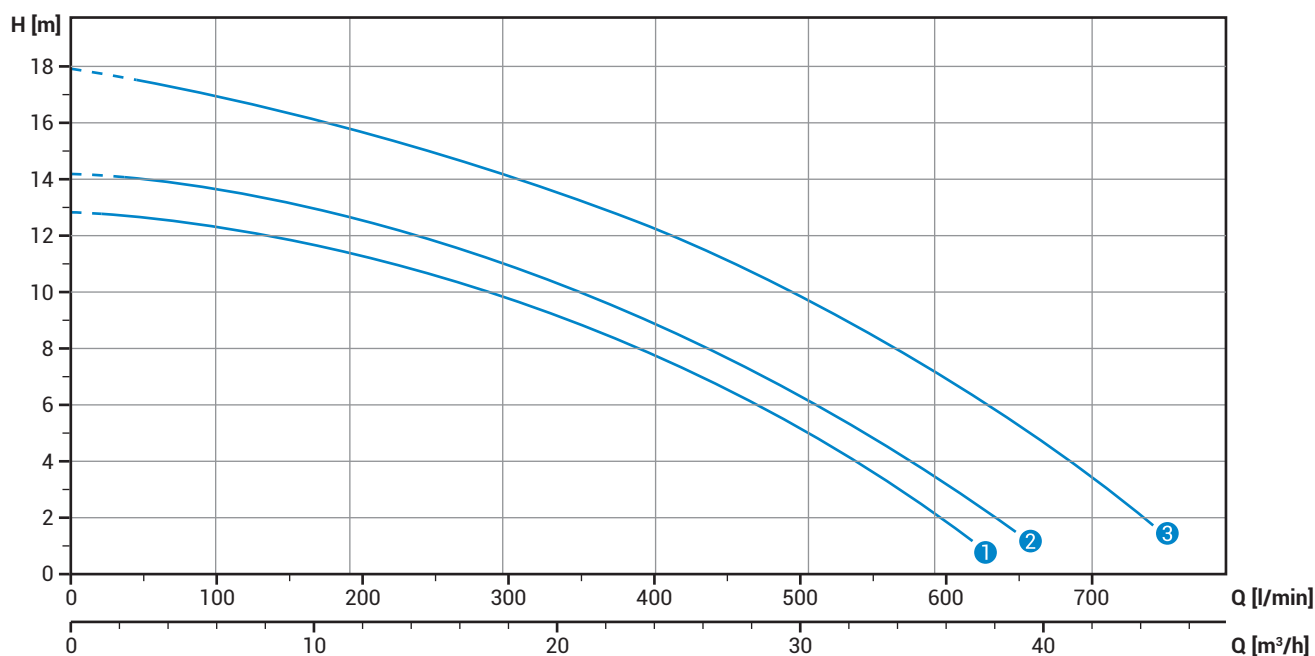


### Technical data

	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Ø	Free passage
① DRE 100/2/G50V A0CM6	230	1	-	0.88	7.3	3480	G 2"	15 mm
② DRE 150/2/G50V A0CM6	230	1	-	1.10	8.2	3480	G 2"	15 mm
③ DRE 200/2/G50V A0CM6	230	1	-	1.50	9.3	3480	G 2"	15 mm
① DRE 100/2/G50V A0CT6	400	3	-	0.88	2.3	3480	G 2"	15 mm
② DRE 150/2/G50V A0CT6	400	3	-	1.10	2.7	3480	G 2"	15 mm
③ DRE 200/2/G50V A0CT6	400	3	-	1.50	3.6	3480	G 2"	15 mm

Models with horizontal flanged and threaded discharge [GAS 2" - DN50 PN10-16] - 2 poles

## Performances

	l/s	0	2	4	6	8	10
	l/min	0	120	240	360	480	600
	m³/h	0	7.2	14.4	21.6	28.8	36.0
① DRE 100/2/G50H A0CM[T]6		12.4	11.8	10.5	8.4	5.5	1.7
② DRE 200/2/G50H A0CM[T]6		16.6	15.8	14.5	12.6	9.8	6.2

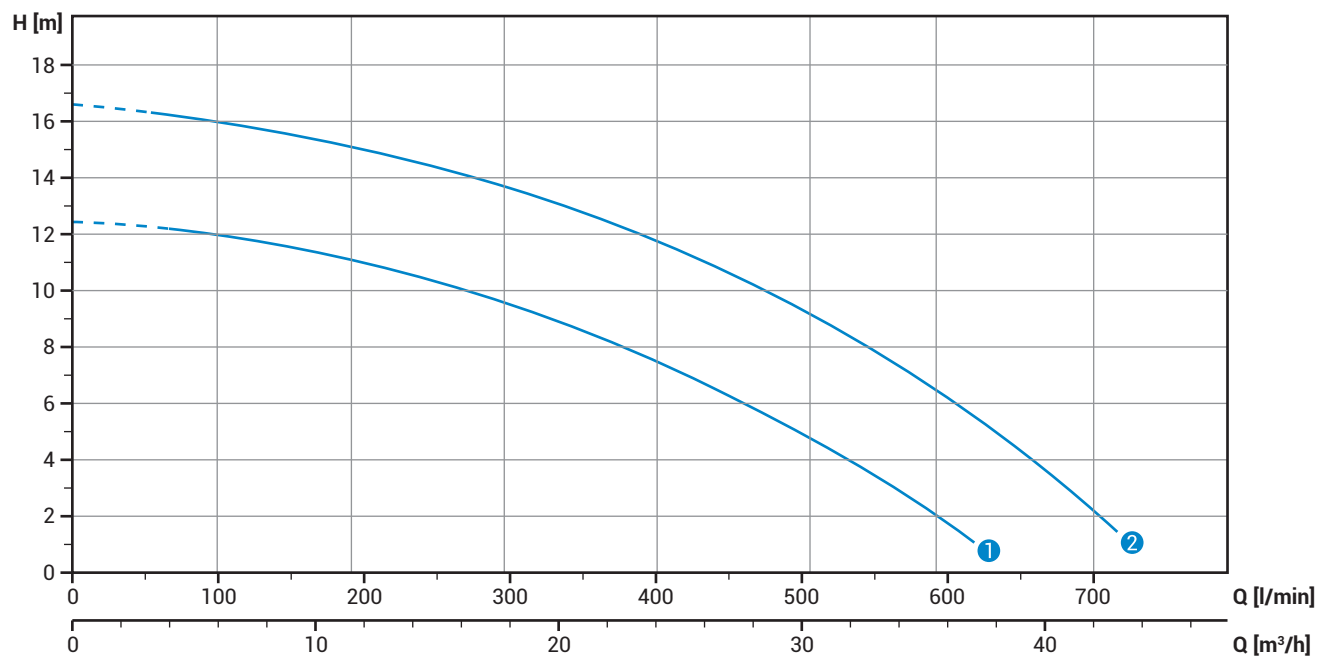




## Technical data

	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Ø	Free passage
① DRE 100/2/G50H A0CM6	230	1	-	0.88	6.5	3480	G 2"- DN50 PN10-16	15 mm
② DRE 200/2/G50H A0CM6	230	1	-	1.50	9.3	3480	G 2"- DN50 PN10-16	15 mm
① DRE 100/2/G50H A0CT6	400	3	-	0.88	2.3	3480	G 2"- DN50 PN10-16	15 mm
② DRE 150/2/G50H A0CT6	400	3	-	1.50	3.6	3480	G 2"- DN50 PN10-16	15 mm

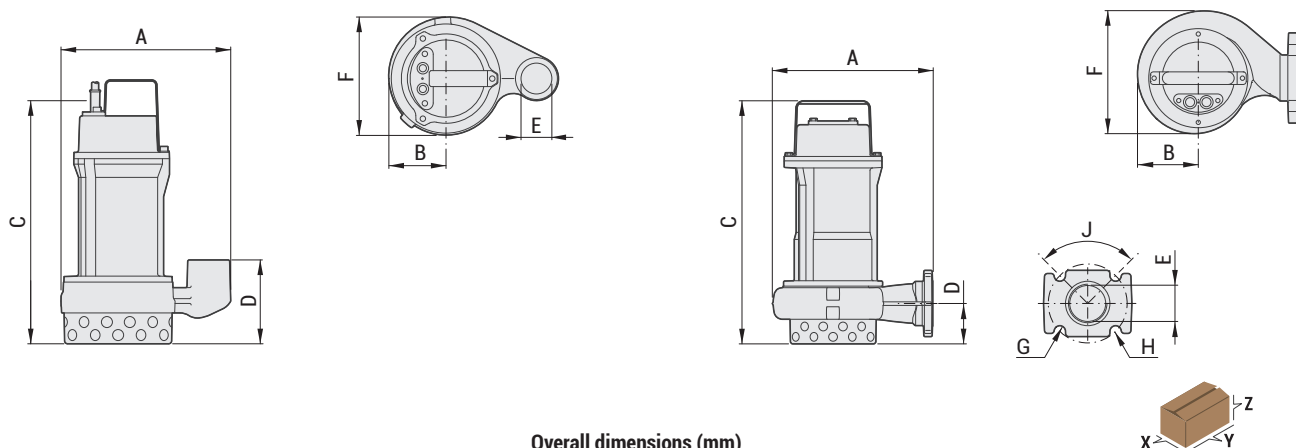

## Dimensions



	Overall dimensions (mm)													
	A	B	C	D	E	F	G	H	J	X		Y	Z	
DRE 50/2/G32V A0BM[T]6	215	70	335	105	GAS 1 ¼"	150	-	-	-	11	225	385	245	
DRE 75/2/G32V A0BM[T]6	215	70	335	105	GAS 1 ¼"	150	-	-	-	13	225	385	245	
DRE 100/2/G50V A0CM[T]6	265	100	385	125	GAS 2"	190	-	-	-	19	285	475	235	
DRE 150/2/G50V A0CM[T]6	265	100	385	125	GAS 2"	190	-	-	-	20	285	475	235	
DRE 200/2/G50V A0CM[T]6	265	100	385	125	GAS 2"	190	-	-	-	21	285	475	235	
DRE 100/2/G50H A0CM[T]6	255	95	385	65	GAS 2" - DN50	195	18	125	90°	19	285	475	235	
DRE 150/2/G50H A0CM[T]6	255	95	385	65	GAS 2" - DN50	195	18	125	90°	20	285	475	235	
DRE 200/2/G50H A0CM[T]6	255	95	385	65	GAS 2" - DN50	195	18	125	90°	21	285	475	235	

## Versions


### Single-phase models

- TC Thermal protection, capacitor
- TCG Thermal protection, capacitor, float switch

### Three-phase models

- NAE No electric accessory
- TRG Thermal protection, relay for motor protection, float switch

## Installations

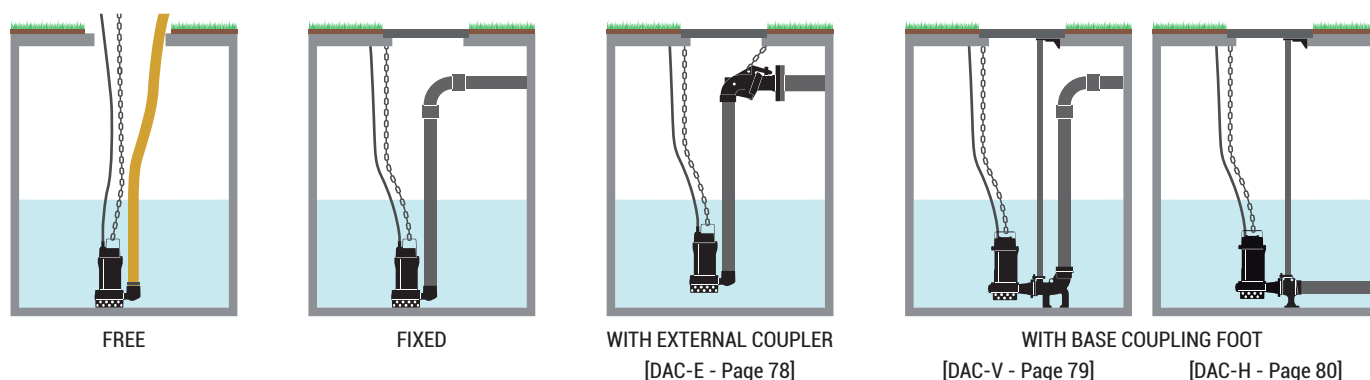

# ZENIT

## PRODUCT RANGE

- » Electrical submersible pumps
- » **Lifting stations**
- » Accessories



# Lifting stations

*nanoBOX • blueBOX*



# Lifting stations

---

**nanoBOX** and **blueBOX** prefabricated lifting stations are an effective solution for collecting wastewater and transferring it to the sewer system, when a gravity feed is not available.

They are mainly used in rural or hilly areas with low population density, without an extensive municipal sewer system.

Given their many advantages, lifting stations are today the best choice for a low cost, safe and eco-compatible solution.

## **nano**BOX



Ideal for collecting water exclusively from domestic drains, including washing machines, showers and sinks [not suited for WCs]

## **blue**BOX



Suitable for collecting and lifting clear, rain and wastewater from washing machines, sinks and WCs in systems installed at a lower level than the sewer, in locations such as garages or basements.

## A problem and its solution

---

Polyethylene lifting stations are suitable for any type of installation. Whether surface or underground, outdoors or indoors, they install quickly and easily with minimal construction work.

## Reduce costs

---

Compared with conventional concrete tanks, prefabricated tanks do not require maintenance and are more resistant to the chemical and mechanical stress induced by black water, as well as being advantageously priced.

## Weight does matter

---

Lifting stations made in a lightweight, highly resistant material like polyethylene have a lower shipping cost and are easier to handle and install, while sacrificing nothing in terms of reliability.

## Power consumption, but only when needed

---

Designed for rational, optimised electricity consumption, thanks to the use of pumps rated to match tank capacity, with automatic float switch control.





## Range characteristics

Capacity [l]	33
kg	8 [DR steel 25/2] ÷ 8.7 [DR steel 37/2]
Number of pumps	1
Power supply	220/240V ~1
Frequency	60 Hz
Protection	IP68
Inlet / Outlet	1 x DN30, 1 x DN40 / DN32 [male thread]
Start	Automatic with floatswitch
C° max water	35°C [for short periods up to 75°C]
Free passage	10 mm

Including: Zenit DR steel 25/2 or 37/2 pump; 10 m cable and integral float switch.


**nanoBOX** is a high quality polyethylene tank intended for collecting water exclusively from domestic drains, including washing machines, showers and sinks (not suited for WC's). The tank has a 33 L maximum capacity and is supplied with a Zenit Steel series submersible pump already installed.

Thanks to its construction and small footprint, **nanoBOX** is very versatile and easy to install.

## Operation and Use


Ideal for collecting water exclusively from domestic drains, including washing machines, showers and sinks (not suited for WC's).

## Installation

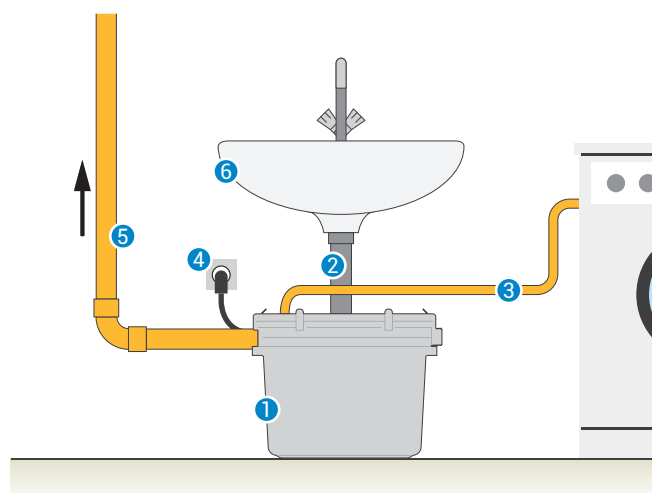

- ① nanoBOX
- ② Inlet from wash basin [with siphon]
- ③ Inlet from washing machine
- ④ Power supply
- ⑤ Outlet pipe
- ⑥ Breather outlet with activated carbon filter. Suitable to external breather pipe [optional]

## Dimensions

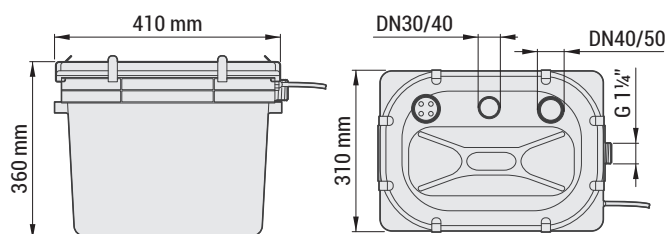

## Recommended pumps

	l/s	0	0.5	1.0	1.5	2.0	2.5								
	l/min	0	30	60	90	120	150								
	m³/h	0	1.8	3.6	5.4	7.2	9.0	V	Phases	P1 [kW]	P2 [kW]	A	Rpm	Ø	Free passage
DR steel 25/2 M50	8.5	7.0	5.7	4.0	1.3			230	1	-	0.25	2.3	2900	G 1¼"	10 mm
DR steel 37/2 M50	13.6	11.6	9.5	7.0	4.5	1.9		230	1	-	0.37	3.1	2990	G 1¼"	10 mm


The **blueBOX** range of high quality polyethylene tanks are extremely versatile and easy to install. They are suitable for collecting clear, rain and wastewater from washing machines, sinks and WCs in systems installed at a lower level than the sewer, in locations such as garages or basements.

The entire range use **blue** or **bluePRO** Series pumps, and are styled to match them.

The **60, 90, 150** and **250** models, suitable for domestic and small residential installations, are equipped to house one electric pump.

The **400** model, intended for civil plants, can be equipped with two electric pumps for complete reliability.

DESIGN BASED ON IN-DEPTH ANALYSIS OF THE CRITICALITIES REPORTED BY PROFESSIONAL USERS IN THE COLLECTION AND DISPOSAL OF DOMESTIC WASTEWATER

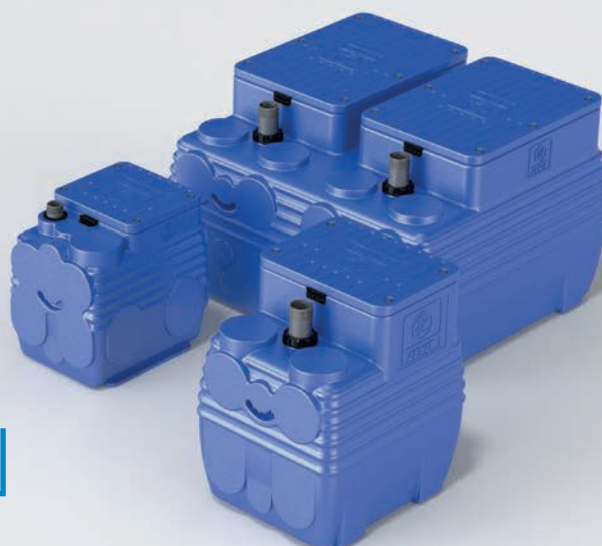

## Range characteristics

60, 90, 150 and 250 models fitted to take one pump; up to two pumps can be installed for 400 model.

Direct installation possible for all models; coupler can be used for 250 and 400 models.

Walk-over cover

Gasket between tank and cover

Simplified intake, discharge and breather pipe installation with watertight gasket

Integral lifting handles

Emergency drainage fitting located low down in the unit


Patented watertight cable gland allowing easy pump removal

Side fins provide an excellent grip for in-floor installation




## COVER

Rugged walk-over cover with gasket. The large cover allows a second pump to be added in emergencies, for easy, hygienic drainage.



## CABLE GLAND

PATENTED modular cable gland system allowing the pump or float switches to be removed with no need to disconnect or extract the power supply cable.




## INTAKES

Wastewater pipeline intake ports also provided on sides.




## HANDLES

Two integral handles for lifting and transport, for easy transfer by hand.



## DRAINAGE

Emergency drainage fitting located low down in the unit (threaded union included).



## GASKETS

Guaranteed airtight thanks to NBR rubber seals which allow quick connection of pipes to the blueBOX with no need for sealants.



## ANTI-OVERFLOW FLOAT SWITCH [OPTIONAL]



Connection to the alarm light and buzzer of a control panel, the float switch warns that the maximum filling threshold has been passed in the case of a pump failure or excessive inflow of wastewater to the tank, allowing quick action to prevent overflows.

**blueBOX** lifting stations can be installed on-floor or in-floor. They are prefitted for use with Zenit **blue** and **bluePRO** series pumps with vortex impeller [DRAGA] or with grinding system [GRINDER], which must be ordered separately depending on the requirements. Specifically, the **blueBOX 60** can also be used with multi-channel open impeller (DRENO) or high head (HIGH HEAD) pumps for higher heads when pumping clear or washbasin wastewaters.

The large number of intake and outlet pipeline fittings allow optimal installation even on existing plants.

The many hydraulic and electric accessories make **blueBOX** lifting stations convenient to install and use. All models are suitable for direct installation thanks to the bottom shaped to hold the pump in position without the aid of additional accessories.



Convenient installation with a bottom coupler is also an option for the **250** and **400** models. A ball check valve and/or a gate valve can be connected to the end of the discharge pipe.

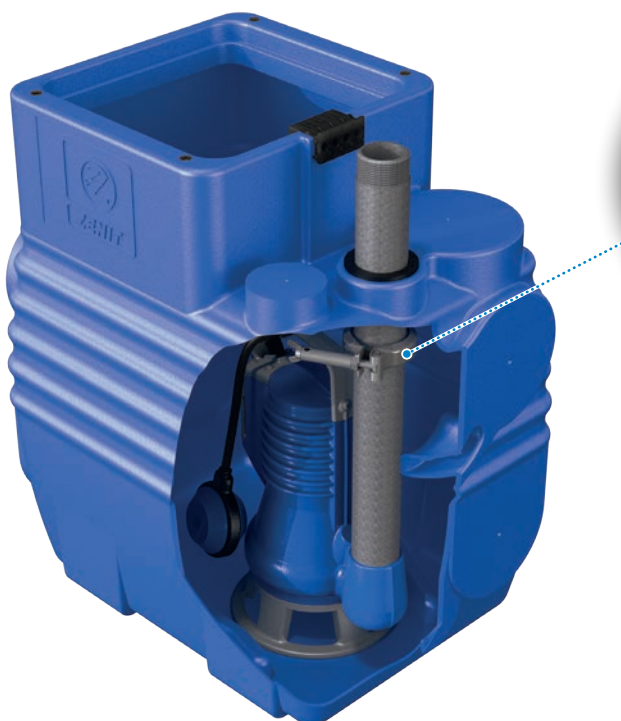

A coupling allows the pump to be easily separated from the plant for **any maintenance requirements, without disconnecting the pipes** from the lifting station.

For simple, labour-saving installation, use of pumps with START/STOP float switch is recommended.

An optional float switch with an overflow alarm function [for connection to an electrical control panel] can be also be used if required.

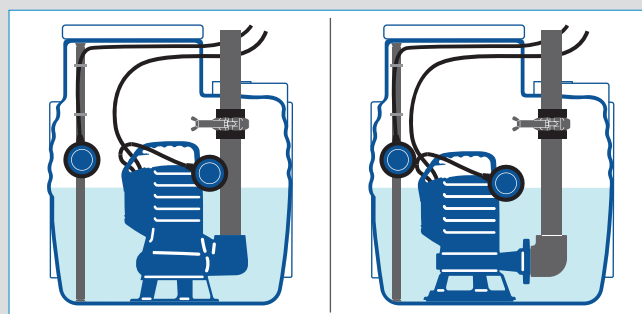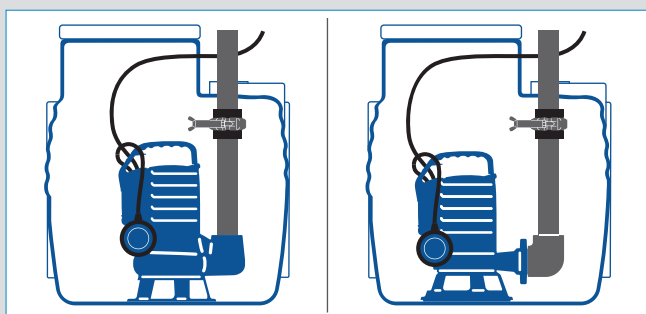



Installing a **blueBOX** lifting station could not be easier. The **blueBOX** lifting station is supplied partially assembled to minimise installation times. A large number of construction features simplify installation, and the accessories supplied allow the system to be optimised in all conditions.



The **blueBOX** can be installed on-floor or in-floor. Intake and discharge pipe fittings are provided on three sides, allowing installation to be optimised to requirements.



Before putting the pump in place, drill holes in the sides of the tank in the chosen points using a flared grinding tool of the right diameter for the pipe to be used.



Fit the double lip seal provided. It guarantees perfect watertightness, with no further sealants required.



An emergency drainage hole should be drilled and then sealed using the through-wall fitting provided, or with an optional gate-valve.



Connect the wastewater intake lines and the breather line (if used).

Then install the pump; this will be easier if the **blueBOX** is fitted with the bottom coupler. In this case, simply lower the pump along the guide pipes until it mates with the coupler. For direct installation, fix the pump to the tube segment and connect this to the discharge pump using the metal collar.



The electrical cables are passed through special patented cable glands that ensure a perfectly watertight seal. Before fitting the cable, perforate the cable glands to be used with a sharp tool, but leave the others intact to keep liquids or smells inside the unit. If the pump has a plug, make a longitudinal cut down one side of the cable gland to allow the cable to pass without jeopardising the seal.




Once installation is complete, check operation of the pump and its float switches. Then replace the cover on the tank and secure it with the screws.

The **blueBOX** lifting station is ready for use. The vast range of plumbing and electrical accessories covers all installation requirements.






	<b>blueBOX 60</b>	<b>blueBOX 90</b>	<b>blueBOX 150</b>
Capacity [l]	60	90	150
Number of pumps	1	1	1
Max operation temperature	40°C [90°C short time]	40°C [90°C short time]	40°C [90°C short time]
Inlet [Ø max]	9xØ110 - 1xØ75	9xØ110 - 1xØ75	10 x Ø110
Outlet	1xØ1½" - 1xØ2"	1xØ1½" - 1xØ2"	1xØ1½" - 1xØ2"
Including	Accessories cable gland, emergency draining connector, special support to reduce the float switch level [blue series pumps only]		
	Outlet pipe	Ø1½" [PVC]	Ø1½" [PVC] - Ø2" [PVC]
	Gaskets	1xØ110mm, 1xØ75mm, 2xØ50mm	1xØ110mm, 1xØ75mm, 1xØ50mm
		1xØ1½" [Outlet]	1xØ1½", 1xØ2" [Outlet]
blueBOX only	8	9	11

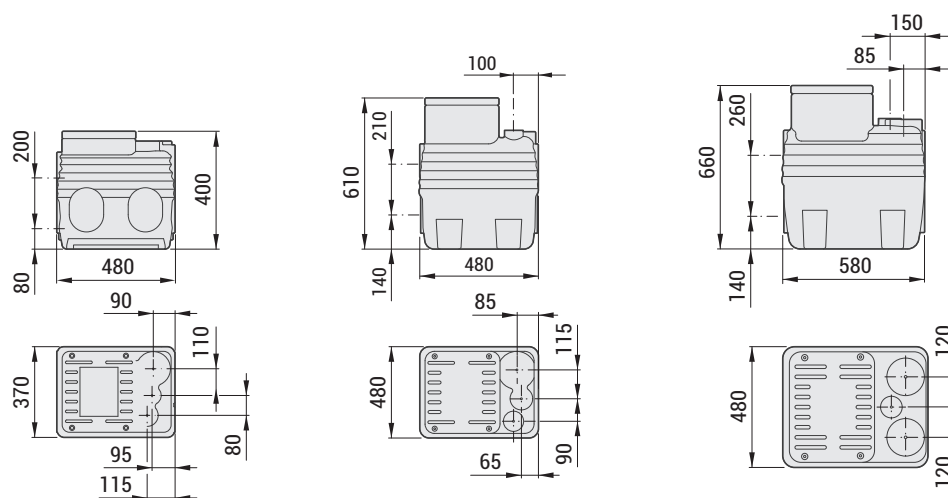

DG blue 40/2/G40V A1BM5	•	•	-
DG blue 50/2/G40V A1BM5	•	•	•
DG blue 75/2/G40V A1BM5	•	•	•
DG blue 100/2/G40V A1BM5	•	•	•
DG bluePRO 50/2/G40V A1BM[T]5	•	•	•
DG bluePRO 75/2/G40V A1BM[T]5	•	•	•
DG bluePRO 100/2/G40V A1BM[T]5	•	•	•
DG bluePRO 150/2/G50V A1CM[T]5	-	-	-
DG bluePRO 200/2/G50V A1CM[T]5	-	-	-
GR bluePRO 100/2/G40H A1CM[T]5	•	•	•
GR bluePRO 150/2/G40H A1CM[T]5	-	-	-
GR bluePRO 200/2/G40H A1CM[T]5	-	-	-



blueBOX 250	blueBOX 400
250	400
1	2
40°C [90°C short time]	40°C [90°C short time]
6 x Ø110	12 x Ø110
1 x Ø1½" ÷ Ø2"	2 x Ø1½" ÷ Ø2"
cable gland, emergency draining connector	
Ø1½" [PVC] - Ø2" [ZN]	Ø1½" [PVC] - Ø2" [ZN]
2xØ110mm, 1xØ75mm	4xØ110mm, 2xØ75mm
1xØ1½", 1xØ2" [Outlet]	2xØ1½", 2xØ2" [Outlet]
15	31

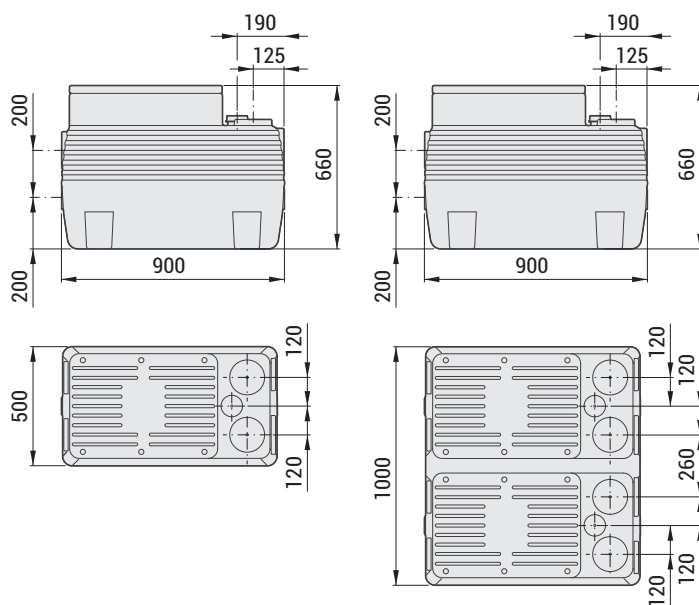


-	-
-	-
-	-
•	•
-	-
-	-
•	•
•	•
•	•
•	•
•	•
•	•

## Accessories supplied


### Cable glands



### Discharge union



### Drain plug



### Float switch stroke reducer



Additional configurations with submersible pumps from other Zenit families are possible. For further information, contact the Zenit Customer Service.

	Installation				Pipe			Float switch		
	FIX	DAC	VDAC	VAP	PVC	PE	ZN	LEVEL2+1	LEVEL3+1	MAX
<b>blueBOX 60</b>	●	-	-	-	Ø1 ½"	-	-	-	-	-
	●	-	-	-	Ø1 ½"	-	-	-	-	●
<b>blueBOX 90</b>	●	-	-	-	Ø1 ½"	-	-	-	-	-
	●	-	-	-	Ø1 ½"	-	-	-	-	●
<b>blueBOX 150</b>	●	-	-	-	Ø1 ½"	-	-	-	-	-
	●	-	-	-	Ø1 ½"	-	-	-	-	●
<b>blueBOX 250</b>	●	-	-	-	Ø1 ½"	-	-	-	-	-
	●	-	-	-	Ø1 ½"	-	-	-	-	●
	●	-	-	-	Ø1 ½"	-	-	●	-	-
	●	-	-	-	Ø2"	-	-	-	-	-
	●	-	-	-	Ø2"	-	-	-	-	●
	●	-	-	-	Ø2"	-	-	●	-	-
	-	●	-	-	-	-	Ø2"	-	-	-
	-	●	-	-	-	-	Ø2"	-	-	●
	-	●	-	-	-	-	Ø2"	●	-	-
	-	●	-	-	-	DN50	-	-	-	-
	-	●	-	-	-	DN50	-	-	-	●
	-	●	-	-	-	DN50	-	●	-	-
	-	●	-	●	-	-	Ø2"	-	-	-
	-	●	-	●	-	-	Ø2"	-	-	●
	-	●	-	●	-	-	Ø2"	●	-	-
	-	-	●	-	-	-	Ø2"	-	-	-
	-	-	●	-	-	-	Ø2"	-	-	●
	-	-	●	-	-	-	Ø2"	●	-	-
	-	-	●	-	-	-	Ø2"	-	-	-
	-	-	●	-	-	-	Ø2"	-	-	●
	-	-	●	-	-	-	Ø2"	●	-	-
<b>blueBOX 400</b>	●	-	-	-	Ø1 ½"	-	-	-	-	-
	●	-	-	-	Ø1 ½"	-	-	-	-	●
	●	-	-	-	Ø1 ½"	-	-	-	●	-
	●	-	-	-	Ø2"	-	-	-	-	-
	●	-	-	-	Ø2"	-	-	-	-	●
	●	-	-	-	Ø2"	-	-	-	●	-
	-	●	-	-	-	-	Ø2"	-	-	-
	-	●	-	-	-	-	Ø2"	-	-	●
	-	●	-	-	-	-	Ø2"	-	●	-
	-	●	-	-	-	DN50	-	-	-	-
	-	●	-	-	-	DN50	-	-	-	●
	-	●	-	-	-	DN50	-	-	●	-
	-	●	-	●	-	-	Ø2"	-	-	-
	-	●	-	●	-	-	Ø2"	-	-	●
	-	●	-	●	-	-	Ø2"	-	●	-
	-	-	● Ø1 ½"	-	-	-	Ø2"	-	-	-
	-	-	● Ø1 ½"	-	-	-	Ø2"	-	-	●
	-	-	● Ø1 ½"	-	-	-	Ø2"	-	●	-
	-	-	● Ø2"	-	-	-	Ø2"	-	-	-
	-	-	● Ø2"	-	-	-	Ø2"	-	-	●
	-	-	● Ø2"	-	-	-	Ø2"	-	●	-

**FIX** Permanent installation  
**DAC** Installation with coupler  
**VDAC** Installation with bottom coupler for vertical discharge pumps

**VAP** Ball check valve  
**PVC** PVC pipe  
**PE** Polyethylene pipe  
**ZN** Galvanised pipe

**LEV2+1** 2 LEVEL float switches + 1 alarm float switch  
**LEV3+1** 3 LEVEL float switches + 1 alarm float switch  
**MAX** Alarm float switch





# ZENIT

## PRODUCT RANGE

- » Electrical submersible pumps
- » Lifting stations
- » **Accessories**



# Hydraulic and electrical accessories

DAC • VAP • KCR • KFL

FLOAT SWITCHES • CONTROL PANELS





# Hydraulic Accessories

A large assortment of hydraulic accessories is available for each electrical submersible pumps to simplify installation and system compatibility.



# Electrical Accessories

A wide range of control panels and accessories for monitoring and control of the pumps installed.





## Couplers

This system allows the pump to be extracted and then quickly returned to the tank with no need to drain it, often an expensive operation involving lengthy plant stoppages. Perfect mating between flange and coupler is ensured on all units in the Zenit range by a rubber seal.

## ESSENTIAL ACCESSORIES FOR MAKING A REVERSIBLE HYDRAULIC CONNECTION BETWEEN THE PUMP AND THE DISCHARGE PIPE



## Innovation

Zenit bottom couplers can have horizontal or vertical discharge in order to better adapt to the customer's needs.

All couplers are designed to receive 2 guide pipes which can accompany the pump into its working position, preventing troublesome rotation.

What's more, a PATENTED system simplifies pump release and reduces the mechanical stresses on the guide pipes, even after an extended period of time immersed in the wastewater.

Another special feature of the Zenit vertical couplers is that they are designed to keep the pump's intake

port at the ideal height, with no need to create a step in the bottom of the tank.

They therefore provide a considerable savings in terms of time and the costs involved in the building of collection tanks as well as easy replacement in pre-existing plants.

# DAC-E

## External couplers

The external coupler [DAC-E] consists of two parts: a fixed part for connection to the plant and a movable part connected to the pump by means of an optional threaded connecting pipe.



The two parts can be connected and disconnected without the aid of tools by means of a lever fixture.



Since this system remains above water level, it can be installed without draining the tank, often a complex, expensive process.

- GAS 2" thread discharge connection
- Fixed part in EN-GJL-250 cast iron, movable part in EN-GJS-600-3
- Epoxy-vinyl paint
- NBR rubber seals
- Full free passage
- Fixing to tank walls by means of DN50 PN10 flange or 2" GAS thread
- With a suitable male/female reduction adapter the accessory can also be used with pumps with 1 1/4" and GAS 1 1/2" discharge ports

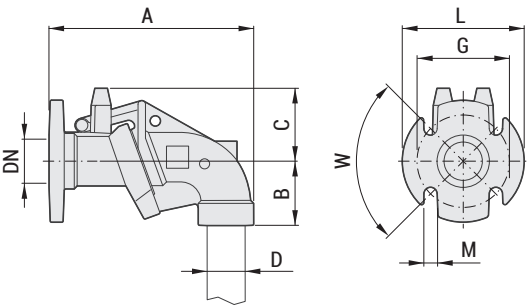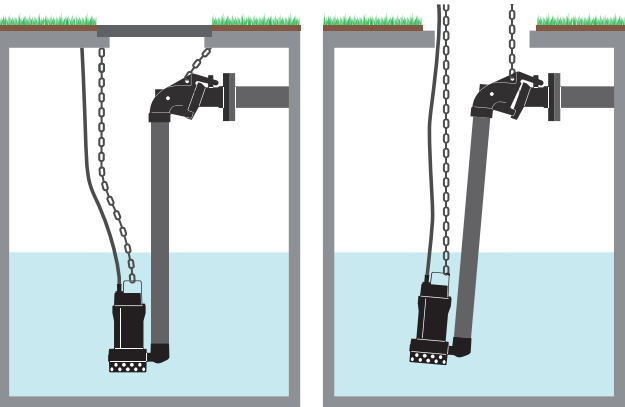

## Installation



Overall dimensions (mm)													
A	B	C	D	DN	G	L	M	W			X	Y	Z
DAC-E G50/50H EN	280	90	100	GAS 2"	GAS 2"	125	165	18	90°	8	225	385	245

# DAC-V

## Bottom couplers with vertical discharge


The bottom coupler with vertical discharge **[DAC-V]** is compact and rugged, suitable for installation in small pits. It allows the pump to be connected to the system and easily disconnected for servicing or storage even without draining the tank. The two guide pipes accompany the pump into position without troublesome rotation.

It can be completed with a 2" ball check valve for installation directly on the discharge.

With an adapter kit, the **DAC-V** can also be used with vertical discharge **blue Series** pumps.

A special valve incorporated in the **DAC's** body expels any air pockets that may form when the pit water level drops below the priming threshold, ensuring the pump is able to operate normally.

- Intake GAS 1 ½" ÷ 2" - DN32 PN6 ÷ DN50 PN10
- Discharge GAS 2" ÷ 2 ½"
- Body in EN-GJL-250 cast iron
- NBR rubber seal
- Epoxy-vinyl paint
- Full free passage
- Complete with fitting for connection to polyethylene pipe (Ø 63 mm) [GTP] or ball check valve [VAP]
- Complete with pipe guide and sliding flange with stainless steel fasteners
- GTP intake GAS 2 ½", discharge GAS 2"
- VAP intake GAS 2 ½", discharge GAS 2"

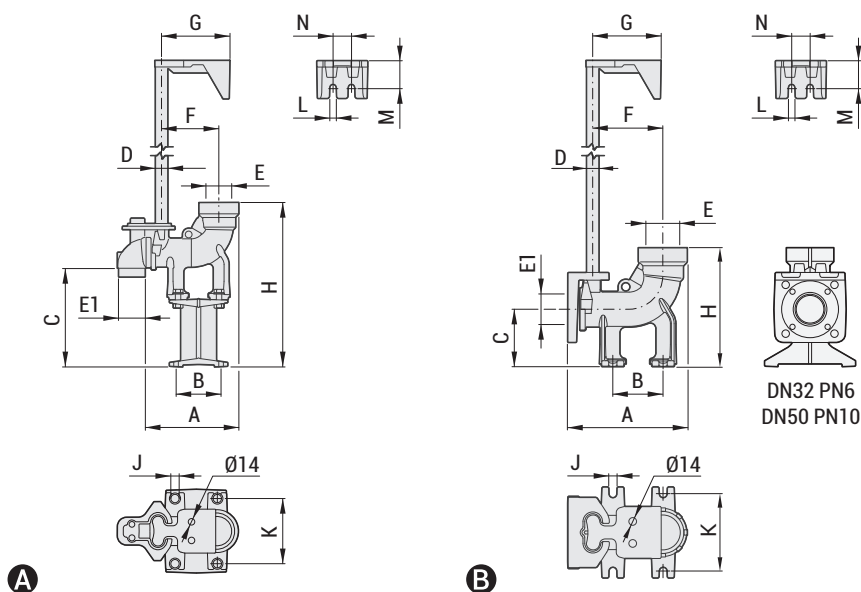

Overall dimensions (mm)


	A	B	C	D	E	E1	F	G	H	J	K	L	M	N	kg
<b>A</b> DAC G40V/G50V-G65V 3/4"+GTP (P)	200	90	165	Ø ¾"	GAS 2" - 2 ½"	GAS 1 ½"	130	125	360	14	140	12	50	35	9
<b>A</b> DAC G50V/G50V-G65V 3/4"+GTP (P)	200	90	220	Ø ¾"	GAS 2" - 2 ½"	GAS 2"	130	125	360	14	140	12	50	35	9
<b>A</b> DAC G40V/G50V-G65V 3/4"+VAP (P)	200	90	165	Ø ¾"	GAS 2"	GAS 1 ½"	130	125	360	14	140	12	50	35	11
<b>A</b> DAC G50V/G50V-G65V 3/4"+VAP (P)	200	90	220	Ø ¾"	GAS 2"	GAS 2"	130	125	360	14	140	12	50	35	11
<b>B</b> DAC 32-50/G50V-G65V 3/4" EN+GTP (P)	220	90	105	Ø ¾"	GAS 2" - 2 ½"	50	130	125	215	14	140	12	50	35	8
<b>B</b> DAC 32-50/G50V-G65V 3/4" EN+VAP (P)	220	90	105	Ø ¾"	GAS 2"	50	130	125	215	14	140	12	50	35	9

# DAC-H

## Bottom couplers with horizontal discharge

Bottom couplers with horizontal discharge are particularly compact, making them ideal for installations in tight spaces. They have 2 guide pipes which can accompany the pump into its working position, preventing troublesome rotation. If the discharge direction has to be modified, the device can be connected to an ordinary 90° threaded bend.

- Body in EN-GJL-250 cast iron
- NBR rubber seal
- Epoxy-vinyl paint
- Full free passage
- DN32-50 models complete with pipe guide, sliding flange (including stainless steel fasteners) and 2" GAS threaded bend in stainless steel
- Intake DN32 PN6 and DN50 PN10, horizontal discharge GAS 2"

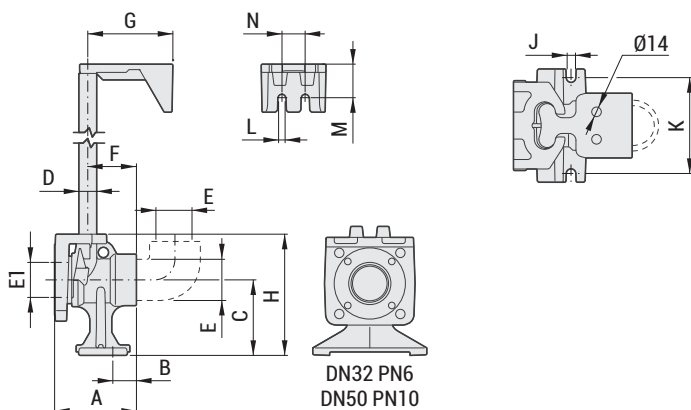

Overall dimensions (mm)

	A	B	C	D	E	E1	F	G	H	J	K	L	M	N	kg
DAC 32-50/G50H-G50V+KAF 3/4" EN (P)	120	35	110	3/4"	50	GAS 2"	70	125	14	140	12	50	35	6.5	11


# KAF

## Sliding flange

Sliding flange for use of DAC-V and DAC-H bottom couplers with pumps with DN32-DN50 flanged horizontal discharge port

Compatible with other couplers with 3/4" guide pipes.

- Complete with NBR rubber seal and stainless steel fasteners
- Sliding flange for DAC-H and DAC-V
- Compatible with other couplers (check guide tube diameter)
- DN32 PN6 - DN50 PN10 flange connections

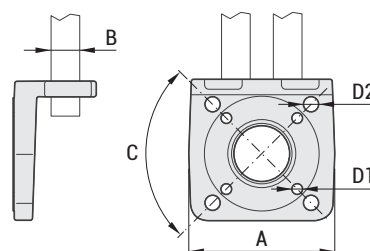

Overall dimensions (mm)

	A	B	C	D1	D2
KAF 32-50	130	3/4"	90°	M12	M16



# VAP

## Ball check valves



**[VAP]** ball check valves prevent backflow during plant maintenance or stoppages. They are designed for use even with soiled wastewaters to provide full guarantees of operation in heavy-duty working conditions. The sinking ball system ensures a free passage since, at maximum opening, the valve has a completely free main line, greatly reducing pressure drops. They can be installed horizontal or vertical and do not require any maintenance.


All Zenit **VAP** valves hold certification under the EN 12050-4 standard, appendix ZA.

The entire range of ball valves have "rubber on rubber" coupling (rubber ball; seal on rubber gaskets), guaranteeing quieter operation and easy restoration of perfect mating between the ball and the sealing lip.

- Structure in EN-GJL-250 cast iron with rubber seals included
- Sinking ball in NBR rubber
- Sealing ensured by rubber on rubber contact
- Stainless steel metal fasteners
- Epoxy paint resistant to aggressive liquids
- Full free passage
- Easily removable cover for plant inspection
- Can be installed horizontal or vertical
- Ambient temperature and pumped liquid:  $0 \div +40^{\circ}\text{C}$
- pH of pumped liquid:  $6 \div 11$
- Density of pumped liquid:  $1 \text{ kg/dm}^3$



	Overall dimensions (mm)									
	A	B	C	D	E	F		X	Y	Z
VAP G32	155	1 1/4"	120	60	110	20°	2	135	200	160
VAP G40	155	1 1/2"	120	60	110	20°	1.9	135	200	160
VAP G50	180	2"	150	72	115	25°	3	135	200	160

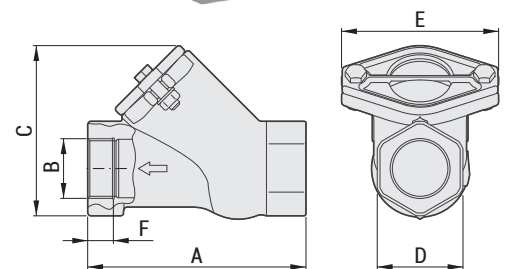




# KCR


## Discharge bends

**[KCR]** discharge bends are used for 90° changes in direction. They provide full free passage.

- Male-female thread (GAS 2")
- Stainless steel structure



	Overall dimensions (mm)						
	A	B - C	L		X	Y	Z
KCR G50/G50 [XX]	90	GAS 2"	90	0.7	230	130	180





# KFL


## Flanges

Complete range of threaded and welded flanges with holes in EN 1092-1 standard positions for maximum compatibility.

- Flange in GJL-250 cast iron painted with epoxy coating




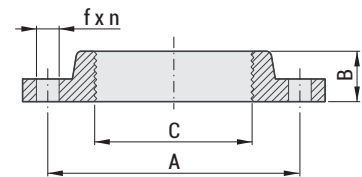
	Overall dimensions (mm)					
	C	d	D	J	S	
<b>KFL 32/G50</b>	GAS 2"	M12	90	90°	15	0.75

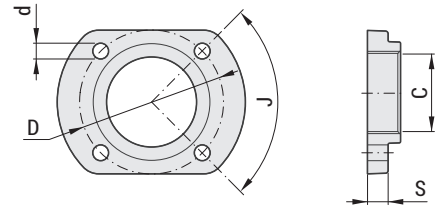

- Threaded and welded flanges PN6 and PN10-16 in accordance with standard EN 1092-1



	Overall dimensions (mm)					
	A	B	C	f	n	
<b>KFL /G50 PN10-16</b>	125	30	GAS 2"	18	4	2.8




# KAT


## Chains

Stainless steel chains for handling pumps and accessories.

- Stainless steel chains
- Suitable for lifting pumps from tanks and wells.



	Overall dimensions (mm)			Weight gr/m	Max load (*) 
	A	B	S		
<b>AISI 316</b>	33	19.5	5	482	325



(\*) Uncertified approximate loads


# FLOAT SWITCHES


## For controlling electric pumps

Zenit float switches are specifically for use with submersible pumps and can easily be fitted with counterweights for precise calibration of switching levels. LEVEL float switches are recommended for installation in large tanks in view of their long strokes, and are suitable for use with soiled wastewaters. They are multicontact type, and can therefore be connected in "normally closed" or "normally open" configuration, for both filling and emptying functions.


MAC3 float switches are recommended for installation with clear or slightly soiled wastewaters and can be used for emptying only, since they are designed for operation solely in ON/OFF mode.



### MAC 3

	Type	Cable		Length [m]			
		Wires			X	Y	Z
10A / 250V	H07RN-F	3G1	5		120	225	160
10A / 250V	H07RN-F	3G1	10		120	225	160

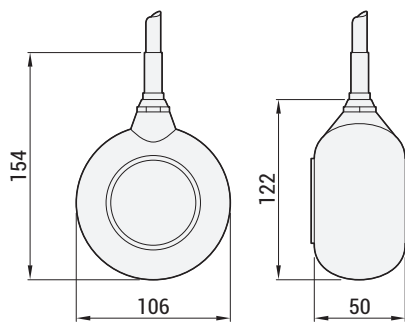

### LEVEL

	Type	Cable		Length [m]			
		Wires			X	Y	Z
6A / 250V	PVC	3G x 0.75	10		240	240	100
6A / 250V	PVC	3G x 0.75	20		240	240	100

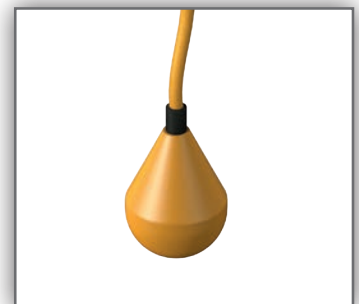

# CONTROL PANELS

## Electromechanical and electronic


Zenit electromechanical and electronic control panels are suitable for the control of any electrical submersible pumps, from 0.37 to 3.7 kW, single-phase or three-phase with direct or star/delta starting.

They are designed for use with float switches and level gauges.

The vast array of standard products is accompanied by customised panels designed to meet specific customer needs.

- Ambient temperature: -5 / 40°C
- 50% relative humidity at 40°C (not condensed)
- IP55 protection rating
- Transformer for auxiliary circuits
- "Power on", "Automatic operation" and "Motor running" LED indicator lights.



	P [Kw]	Thermal protector current [A]	kg			
				X	Y	Z
Q1M 0402	0.37	3 ÷ 4.5	4	170	240	340
Q1M 0404	0.55	4.5 ÷ 6.5	4	170	240	340
Q1M 0406	0.75	6 ÷ 9	4	170	240	340
Q1M 0408	1.1	9 ÷ 10.5	4	170	240	340
Q1M 0410	1.5	9 ÷ 13.5	4	170	240	340
Q2M 0602	0.37	3 ÷ 4.5	7	150	300	420
Q2M 0604	0.55	4.5 ÷ 6.5	7	150	300	420
Q2M 0606	0.75	6 ÷ 9	7	150	300	420
Q2M 0608	1.1	9 ÷ 10.5	7	150	300	420
Q2M 0610	1.5	9 ÷ 13.5	7	150	300	420
Q1T 1014	0.37	0.9 ÷ 1.3	4	170	240	340
Q1T 1016	0.55	1.4 ÷ 2	4	170	240	340
Q1T 1018	0.75 ÷ 1.1	2 ÷ 3.2	4	170	240	340
Q1T 1020	1.5	3 ÷ 4.5	4	170	240	340
Q1EL M	0.37 ÷ 2.2	2 ÷ 16	1.5	170	240	340
Q2EL M	0.37 ÷ 2.2	2 ÷ 16	3	170	240	340
Q1EL T	0.55 ÷ 3.7	2 ÷ 8	2	170	240	340

Weights and measurements are guideline - Dimensions in mm



# CONTROL PANELS

## Electromechanical and electronic

	Models available					
	Q1M	Q2M	Q1T	Q1ELM	Q2ELM	Q1ELT
Input voltage 230V $\pm$ 10% ~ 1 50/60 Hz	●	●	-	●	●	-
Input voltage 400V $\pm$ 10% ~ 3 50/60 Hz	-	-	●	-	-	●
230/24 V transformer for auxiliary circuits	●	●	-	-	-	-
400/24 V transformer for auxiliary circuits	-	-	●	-	-	-
"Power on" light	●	●	●	●	●	●
"Motor running" light	●	●	●	●	●	●
"Automatic Operation" light	-	-	-	●	●	●
"Level alarm" light	-	-	-	●	●	●
"Motor cut out due to overload" light	-	-	-	●	●	●
"Motor cut out" light	●	●	●	-	-	-
Protector reset button	-	-	-	●	●	●
24 V AC line contactors, AC3 duty	●	●	●	-	-	-
Motor protection fuses	●	●	●	●	●	●
Auxiliary circuit protection fuse	●	-	●	●	●	●
Main switch with door lock	●	●	●	●	●	●
Thermal relay for overload protection on every motor with adjustable scale and internal reset	●	●	●	-	-	-
Very low voltage input for command from pressure switch or float switch	-	●	-	●	●	●
Very low voltage input for command from pressure switch or operating level float switch	●	-	●	-	-	-
Very low voltage input for command from pressure switch or minimum level float switch	●	-	●	-	-	-
Motor AUTO-OFF-MANUAL switch	●	●	●	●	●	●
ABS housing	●	●	●	●	●	●
Output with cable holder	●	●	●	●	●	●
Start/stop kit for 2 float switches	●	-	●	-	-	-
Alternating relay for 2 pumps	-	●	-	-	●	-
Input for command from pressure switch or float switch protecting against dry running	-	●	-	-	-	-
Very low voltage input for external command from 3 minimum level gauges	-	-	-	●	●	●
Suitable for use with gauges for non-flammable conductive liquids (not included)	-	-	-	●	-	●
Gauge filling/emptying mode selector	-	-	-	●	●	●
Internal gauge sensitivity regulator	-	-	-	●	●	●
Adjustable electronic motor overload protector	-	-	-	●	●	●
Protector trigger time 5"	-	-	-	●	●	●
Alarm output with N.O.-C-N.C. switching contacts (rated 16A 250V resistive load)	-	-	-	●	●	●
With capacitor connections	-	-	-	●	-	-
PCB for operation with 2 float switches	-	-	-	●	-	●
Pump alternation PCB	-	-	-	-	●	-
Integral pump alternation circuit with 4" startup delay	-	-	-	-	●	-



# One-click access to the right solution for you

Zeno Navigator Suite is a platform of services offered by Zenit. A very effective on line and mobile tool for managing the entire pre- and after-sales process.

Designed to meet the needs of sector professionals, whether you are an engineering firm, a plant operator or just an installer, the ZENO portal is an extremely effective tool for managing your business.

The ZENO Pump Selector application provides useful assistance throughout the electric pump selection and configuration process, and the product that meets the search parameters can be swiftly identified through selection by duty point or type of hydraulics.


## ZENO Navigator Suite

Web: [zenonavigator.zenit.com](http://zenonavigator.zenit.com)

Mobile, ZenoApp on smartphone and tablet, available for iPhone and Android




Offline, on digital medium

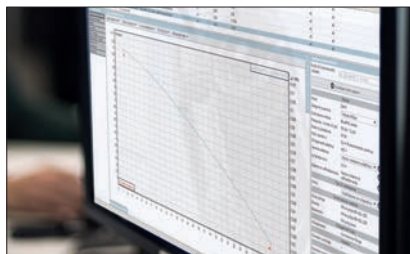

### Pump Selector

The application that provides invaluable assistance for the entire Zenit electric pump selection and configuration process, right through to generation of the final quotation.

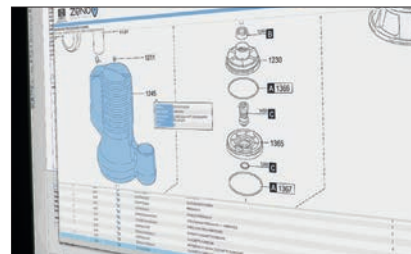

### Spare Parts

It is a quick, user-friendly tool enabling you to easily select the spare part you require, add it to your cart and automatically send us the order, with just a few clicks.



[zenonavigator.zenit.com](http://zenonavigator.zenit.com)




### Academy

The Academy selection offers you all information required for knowledge of and training in Zenit products and services.



### After-Sales Service

Zenit has made meticulous design and construction its calling-card. If problems of any kind arise, Zenit provides effective service through its dealers worldwide.

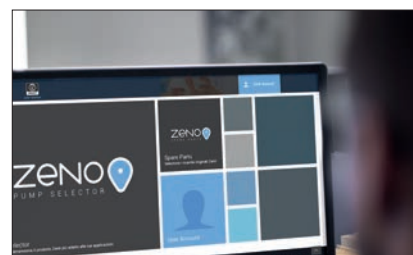

### Download

You have access to a library of Zenit and industry technical and commercial documentation.

# Our values

## Innovation

---

We generate new ideas by listening to all our partners and adopting streamlined decision-making processes.

We work on constant improvement of products and efficiency of service.

We are equipped for change, thanks to our dynamic culture which allows us to make a difference and distinguish ourselves from our competitors.

## Customer-Focus

---

We place the customer's needs at the centre of our corporate decision-making process.

At Zenit, we work to ensure optimal communication in the supplier-customer relationships, also on a personal level, always keeping the highest professional standards.

## Tradition

---

The Zenit brand's tradition is based on the work of skilled, dedicated people who have given value and credibility to our solutions over the years, highlighting the expertise of those who have spent a lifetime on the market and therefore know what to do and how to do it.

Tradition is a source of reliability, solidity and the ability to keep promises, guaranteeing the quality of our products and the solutions delivered to our customers.





THE VALUES THAT GUIDE US, THAT WE WANT TO BE IDENTIFIED WITH AND THAT GIVE US OUR COMPETITIVE EDGE MUST INSPIRE THE BEHAVIOUR OF US ALL: FROM STRATEGIC DECISIONS TO DAILY ROUTINES



## Ethics

We give high priority to social responsibility, by making reliable and safe products.

Moreover we give back to society by investing part of our profits to community and social projects as we believe our continuity is dependent on the well-being and perpetuation of society.

## People-oriented approach

The passion that merges competence and professionalism in every single project is paramount for us.

An inspiring passion that generates enthusiasm, precision and a commitment to research.

All our staff is involved in the company's dynamics as we believe in training and professional growth.

## Specialisation

All Zenit products are designed to satisfy our customers' needs.

We design every detail using state-of-the-art software and the highest quality standards; we carefully select primary materials, use latest-generation machines and apply certified corporate procedures.

## Efficiency

We aim to make good use of our resources – people, energies and finances– so that they work together at their best to deliver efficient solutions. This is the only way to achieve results that will stand the test of time.

This is what we mean by efficiency.

# ZENIT

## PRODUCT OVERVIEW

### » Water solutions



#### Electric Pumps - Domestic

A wide range of electrical submersible pumps, with with channel or Vortex impellers or with grinding system, for use in the domestic sector.



#### nanoBOX

**nanoBOX** is a polyethylene tank intended for collecting water from domestic drains, including washing machines, showers and sinks (not suitable for WCs).



#### Aeration and mixing systems

A line of aeration and mixing products for the civil and industrial wastewater treatment sector.



## Electric Pumps - Professional

A wide range of electrical submersible pumps that covers all requirements in the industrial and professional sector.



## Uniqa - High efficiency

The **UNIQA** range is the ideal solution for any kind of civil and industrial installation thanks to the wide choice of high-efficiency motors up to 355 kW.



## blueBOX

The **blueBOX** series consists of high quality rotary moulded polyethylene tanks for collecting grey and black wastewater.



## BOX PRO

The **BOX PRO** series comprises rugged medium density polyethylene lifting stations, for use in large capacity civil and residential applications.




## Hydraulic accessories

Our accessories range includes base plates, couplers, check valves, gate valves and flushing valves.



## Electrical accessories

A wide selection of electrical and electronic control panels, alarm devices and remote control units for convenient, efficient control of your system.



water solutions

The data provided are not binding.  
Zenit reserves the right to modify the product without advance notification.

For further information, visit [www.zenit.com](http://www.zenit.com)

Code: **29040040000400001**  
Version: **01**

The digital version of this catalogue is available for download at: [www.zenit.com](http://www.zenit.com)